
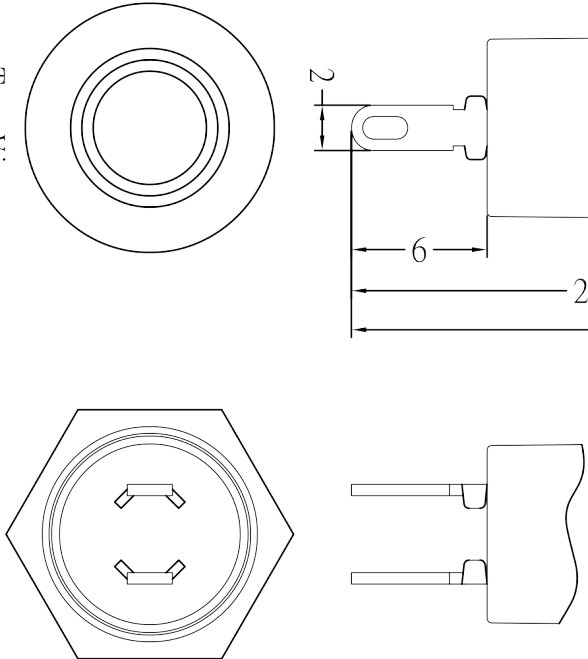
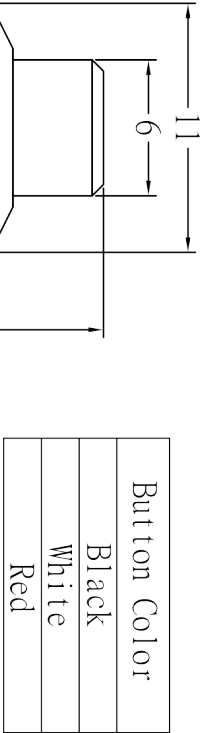


1. Electrical rating: 1A 125V AC / 0.5A 250V AC
2. Circuit: 2P (SPST)
3. Function: PUSH ON
4. Contact Resistance: 2.5V DC 10mΩ or less
5. Insulation Resistance: 500V DC 100MΩ or More
6. Voltage Breakdown: 1000V AC 1min
7. Electrical life: 100000 cycles
8. Temperture rise at the terminal: Max. 30℃
9. Solder ability of terminal: Max. 300℃ 3 Sec
10. Mtg. Hole Dial mm: 10∅ mm

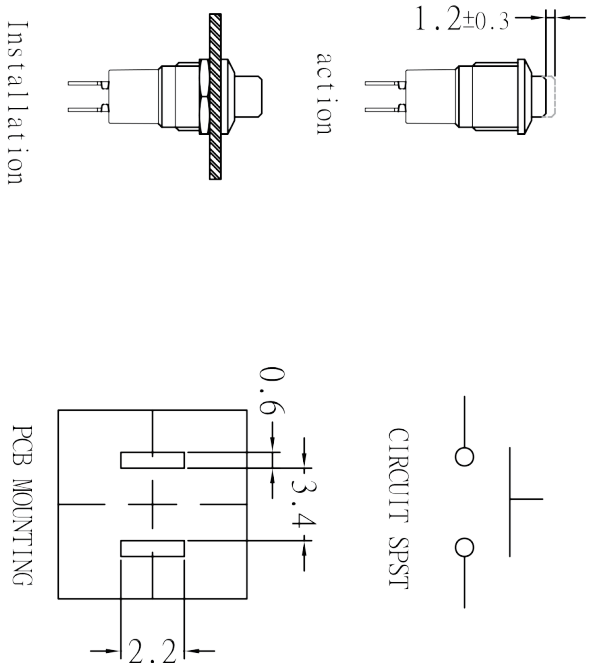

50041A				SCALE	3:1	DIM	mm
				DMN. BY	H. R. S.	DATE	2009-8-10
				CHK. BY		APP. BY	
				DWG. NO.		F-001A-D01	
大 廣 有 限 公 司 DA KOANG CO., LTD.				PAGE		1/1	