

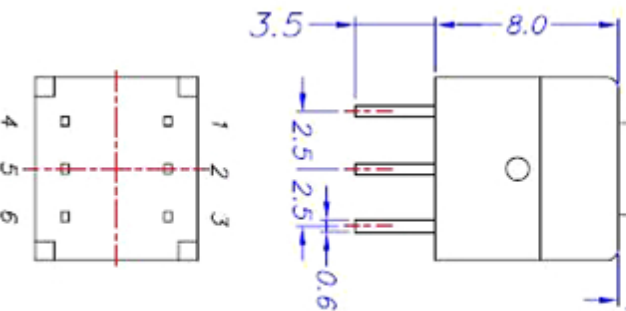
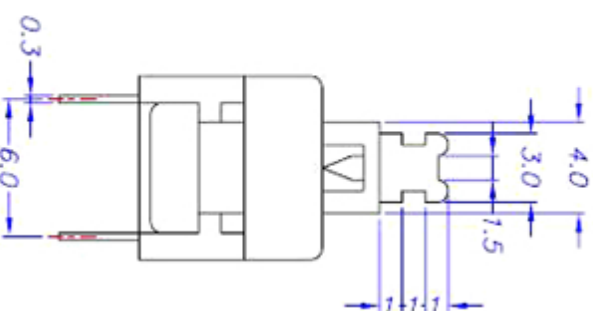
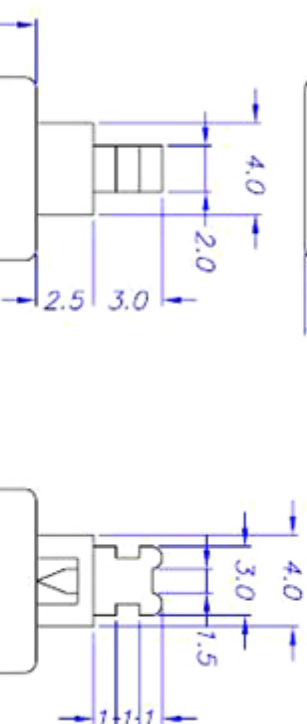



P.C.B. LAYOUT

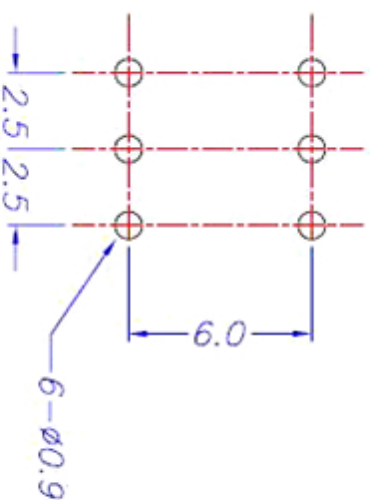

CIRCUIT

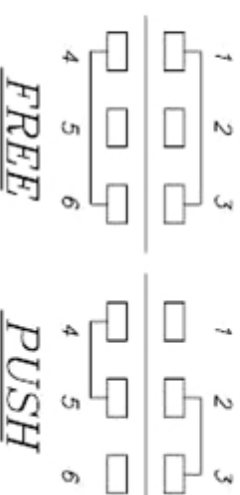

SPECIFICATIONS:

1. Rating :DC 30V 0.1A
2. Operating Force :200±80gf
3. CIRCUIT:2C-2P
4. Timing:Non-shorting
5. Operating Mode: Non-lock
6. Stroke:Full 2.5mm
Lock 1.5mm
7. General Tolerance:±0.2mm.
8. LIFE EXPECTANCY: 100,000 CYCLES

大 廣 有 限 公 司 DAKOANG CO., LTD.

DATE	DWN	CHKD	APVD	MANAGFR
12.26.2011				

PART NAME: MINATURE PUSH SWITCH PART NUMBER: 5073A VERSION:4.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

1 2 3 4 5 6 7