
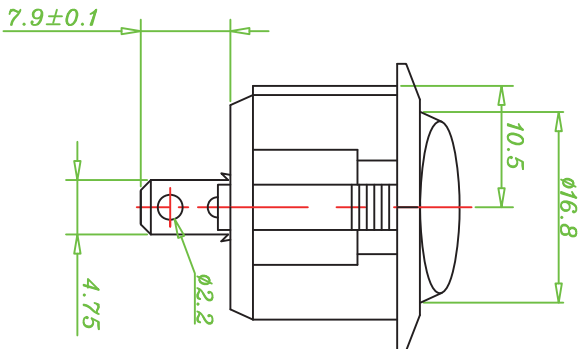
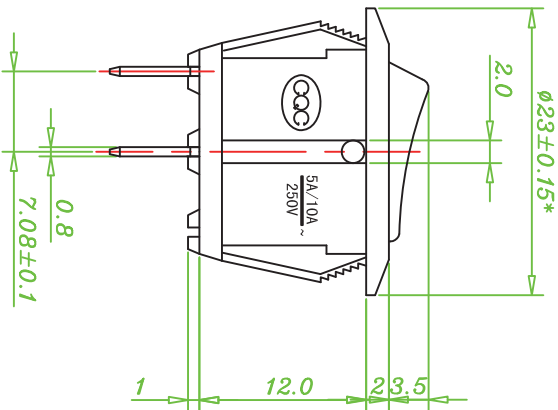
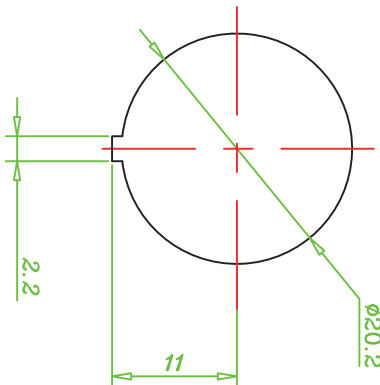




SPECIFICATION

CONTACT RATING

: 5A/250VAC 10A/125VAC (VDE RL)
10A 250V/125V (S)
6(1) A/250V ~ UT85/55 (D N S FL)
5A/250V ~ (QQ)

INITIAL CONTACT RESISTANCE: 50m Ω Max.
INSULATION RESISTANCE : 500 Megohms Min 500VDC.
WITHSTAND VOLTAGE : 1,000 VAC-1 Minute.
LIFE EXPECTANCY : 10,000 Cycles.
OPERATING FORCE : 400±200 gF.

MODEL NO	SCHEMATIC
5170	

Safety Certificate	FILE NO:
RL	E105856
S	LR112904-6
N	40027238
FL	QQC03002004731

Safety Certificate	FILE NO:
D	313271-01
S	502273
N	P05203712
FL	21533

大 廣 有 限 公 司 DAKOANG CO., LTD.				DES	BR SERIES	
>0.3~6 ±0.1		DRW	F. J. R	05/04/07	TITLE	ROCKER SWITCH
>6~30 ±0.15		DESIGN	F. J. R	05/04/07	DWG NO.	PNA-000129
>30 ±1°		CHECKED			MODEL	5170
SCALE 1.5:1		UNIT mm	APPROVED		VERSION	A2
PROJ		TOTAL 1	PAGE 1	DATE		