

SPECIFICATION

CONTACT RATING

:5A250VAC 10A125VAC (VDE RJ)
 10A 250V/125V (CIS RJ)
 6(1)A250V ~ uT85/55 (D N S FD)
 5A/2X250V ~ (CIS)



INITIAL CONTACT RESISTANCE: 50m Ω Max.

INSULATION RESISTANCE :500 Megohms Min 500VDC.

WITHSTAND VOLTAGE :1,000 VAC-1 Minute.

LIFE EXPECTANCY :10,000 Cycles.



OPERATING FORCE : 400 ± 200 gf.

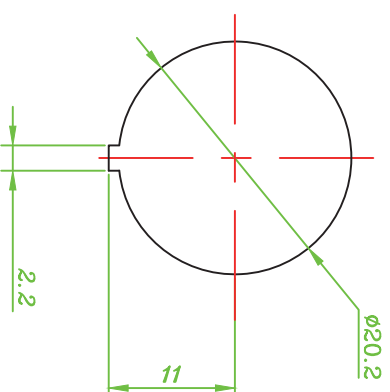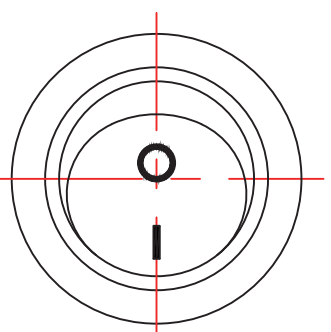

MODEL NO	SCHEMATIC
BR-11C-11L-C	

Safety Certificate	FILE NO:
	E105856
	LR112904-6
	40004251
	CQC03002004731

Safety Certificate	FILE NO:
①	116036
②	9432010
③	P05203712
④	21533

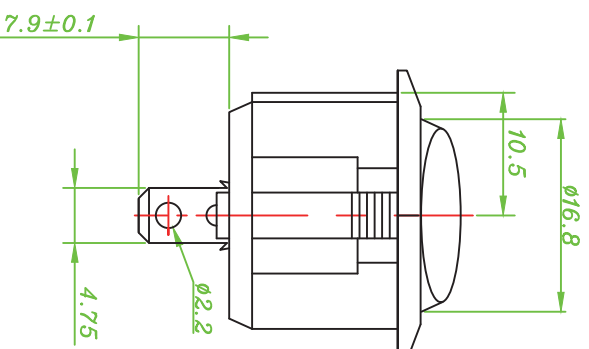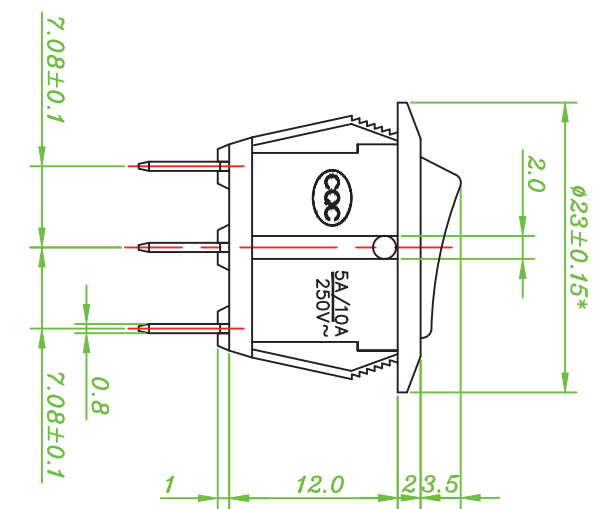[illegible]

大廣有限公司 DA KOANG CO., LTD.

DES

BR SERIES

TOL	
>0.3~6	± 0.1
>6~30	± 0.15
>30	± 0.2

TITLE	ROCKER SWITCH
DWG NO.	PNA-000164

SCALE	1.5:1	UNIT	mm	APPROVED
-------	-------	------	----	----------

APPROVED

VERSION

A1

PRO

TOTA

PAGE

(1)

DATE _____