

SPECIFICATION

CONTACT RATING

:5A250VAC 10A125VAC (VDE 
10A 250V/125V ()
6(1) A250V ~ uI85/55 () )
5A/2X250V ~ ()

INITIAL CONTACT RESISTANCE:50Miliiohms Max.



INSULATION RESISTANCE :500 Megohms Min 500VDC.

WITHSTAND VOLTAGE :1,000 VAC-1 Minute.

LIFE EXPECTANCY :10,000 Cycles.


OPERATING FORCE :400±200 gf.

MOUNTING HOLE

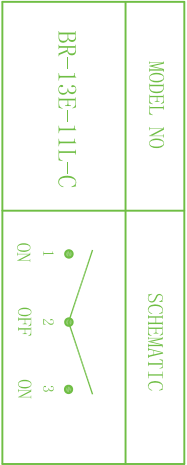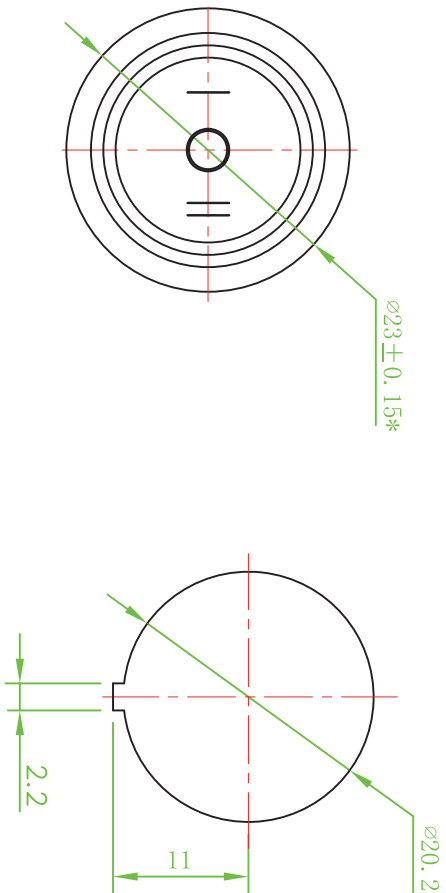

Safety Certificate	FILE NO:
	E105856
	LR112904-6
	40004251
	CQC03002004731

Safety Certificate	FILE NO:
	116036
	9432010
	P94100673
	175590-01

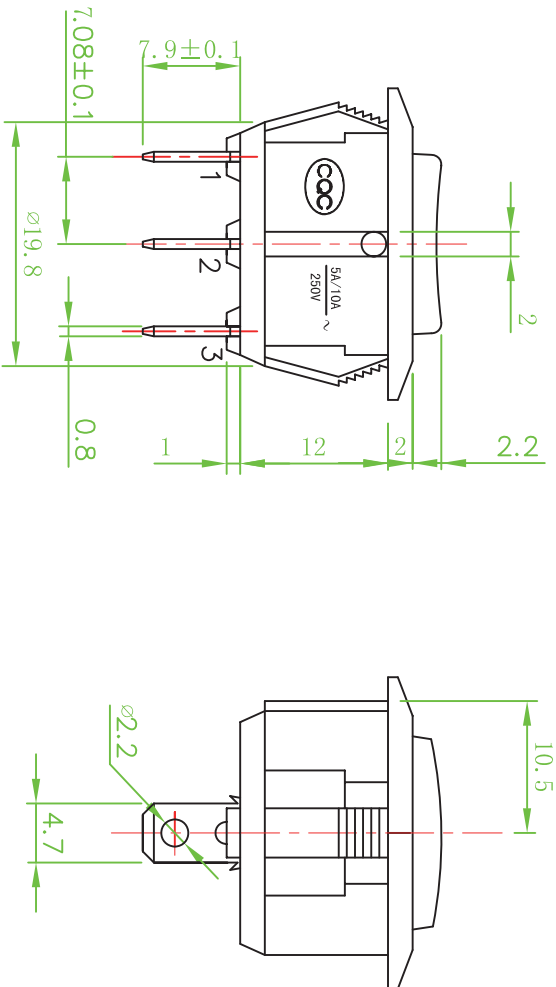

PRONIC ELECTRONICS (SHENZHEN) CO., LTD				DES	BR SERIES
TOL	>0.3~6 ±0.1	DRW	F. J. R04/11/27	TITLE	ROCKER SWITCH
	>6~30 ± 0.15	DESIGN	F. J. R04/11/27	DWG NO.	PNA-000099
	>30 ±0.3 ANG ±1°	CHECKED		MODEL	5172
SCALE	1.5:1 UNIT	mm	APPROVED	VERSION	A1
PROJ		TOTAL 1	PAGE 1	DATE	