


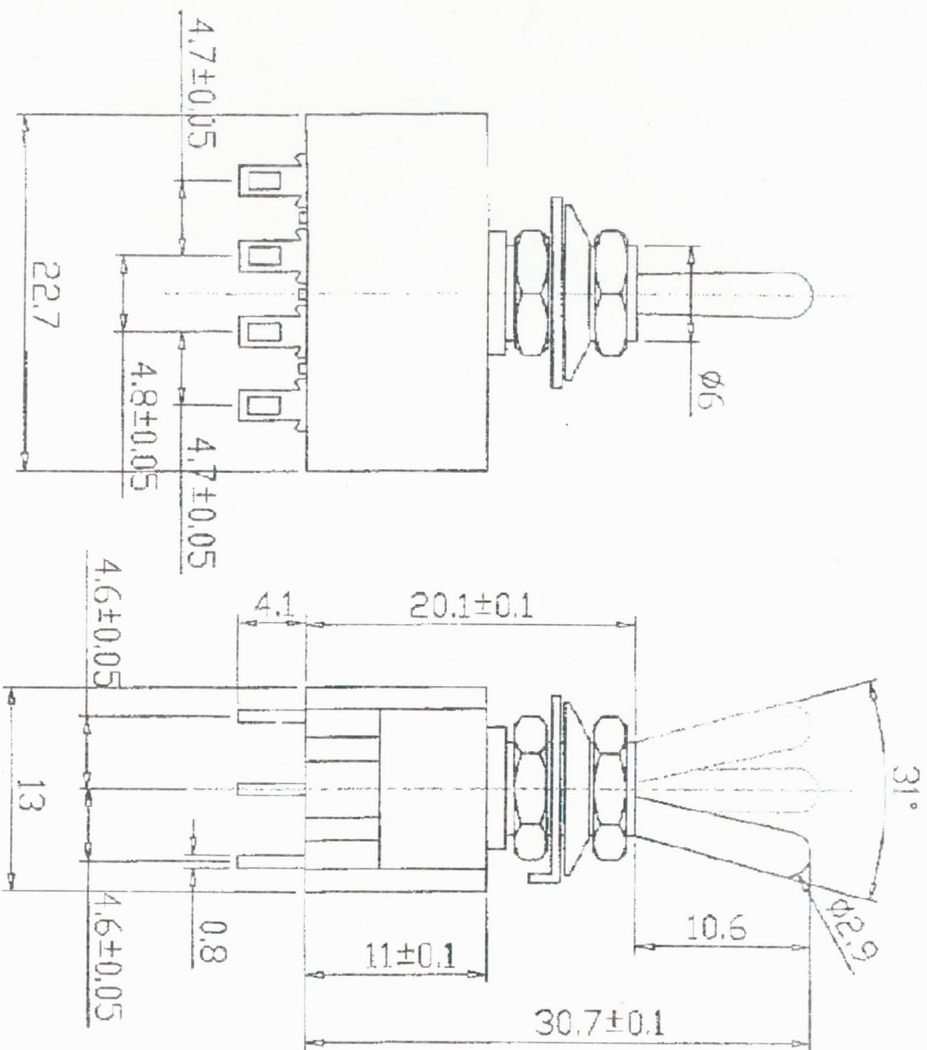

一般公差	尺寸範圍	公差
0.5-5	±0.2	
6-30	±0.4	
30-120	±0.5	
120-315	±1	
315-1000	±1.6	
1000-2000	±2.4	

ND.	MODEL ND.	SWITCH FUNCTION			TERMINAL QUANTITY
		POS.1	POS.1	POS.1	
4PDT	5178B	ON	OFF	UN	12P

SPECIFICATION

CONTACT RATING: 5 AMPS @120 V AC or 28 V DC.
 2 AMPS @250 V AC or 0.4 AMPS @20 V AC or DC.
 ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
 CONTACT RESISTANCE: 10 mΩ max. initial @ 2-4 V DC.
 100 mA, for both silver and gold plated contacts.
 INSULATION RESISTANCE: 1,000 MΩ min.
 DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
 OPERATING TEMPERATURE: -50°C to 150°C

大慶有限公司
 DA KOANG CO., LTD.

母件編號
 物料編號
 單位 mm

母件名稱 格頭 SW (12P)
 物料名稱
 數量 1 PCS 日期 991203