

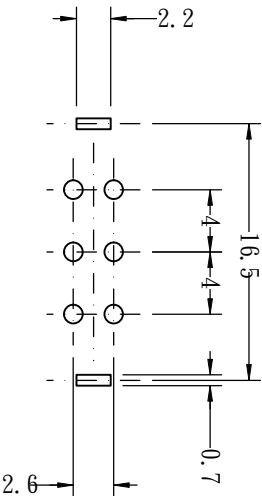
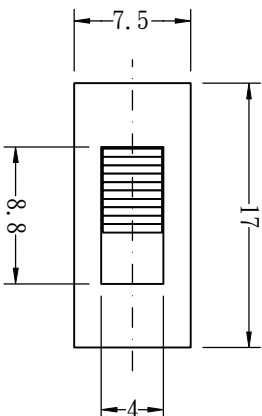


P. C. B. HOLE DETAIL

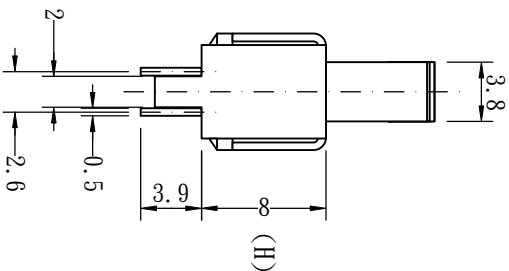


General specifications

Circuit	: ON-ON(2P2T)
Rating	: D.C. 50V 0.5A
Contact R. [max]	: 50mΩ (initial)
Insulation R. [min]	: D.C. 500V 100MΩ
Withstand VOL.	: A.C. 500V 1minute
Timing	: Non Shorting
Operating force	: 300±100g
Life cycle [max]	: 10,000 CYCLES

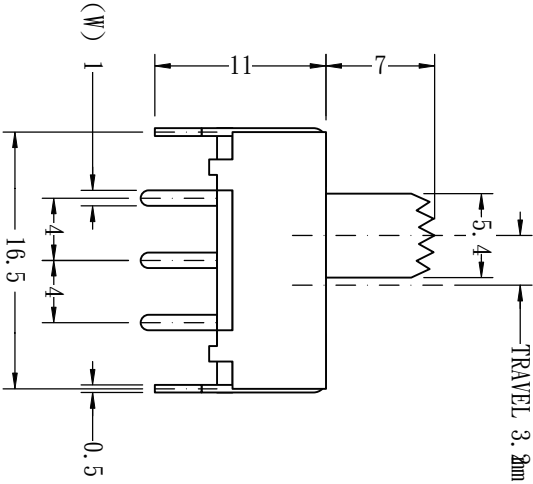

SCHEMATIC



比例 SCALE 1 : 2

單位 DIMENSION mm

DO NOT SCALE DRAWING
TOLERANCES UNLESS OTHERWISE


DP TO 10 ±0.3
ABOVE 10 TO 100 ±0.5
ABOVE 100 ±0.8
ANGULAR DIMENSIONS ±5°

品名 TITLE Slide Switch

型號 MODEL 5067

繪圖 DRAWN HSH

核准 APPROVED HSH



版次 REVISION

A

日期 DATE

2019/4/24

大 廣 有 限 公 司
DA KOANG CO., LTD.