

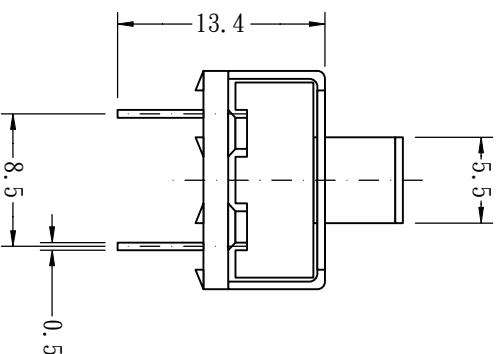
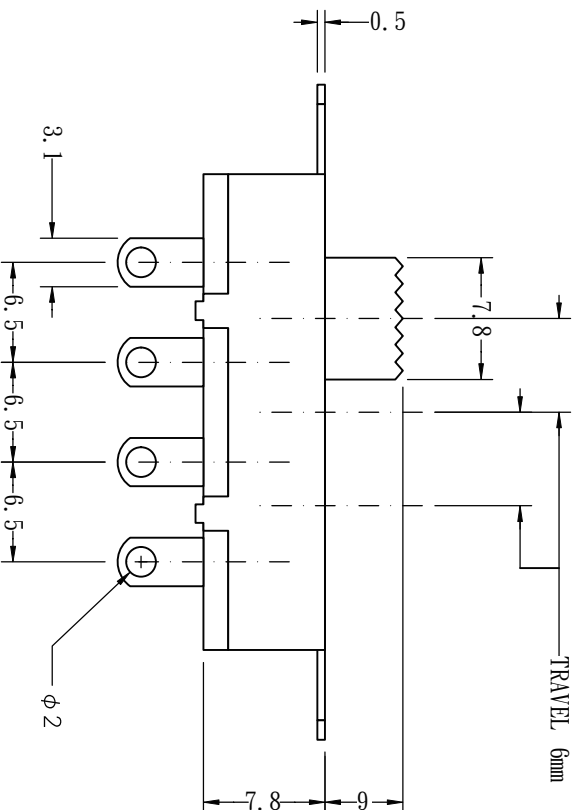


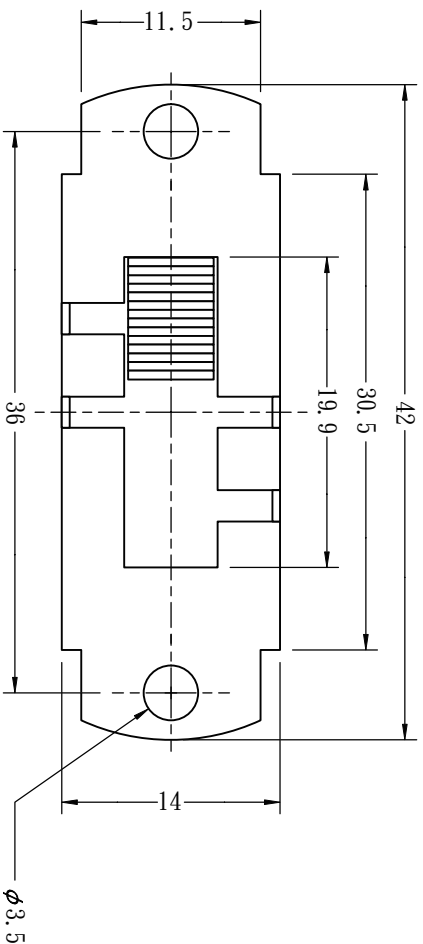

General specifications

Circuit : ON -ON -ON (2P3T)
Rating : A.C. 250V3A
Contact R. [max] : D.C. 5V 1A 30m Ω
Insulation R. [min] D.C. 500V 10M Ω
Withstand VOL. : A.C. 500V 1minute
Timing : Non Shorting
Operating force : 300 $\pm$ 100 g
Life cycle [max] : 10,000 CYCLES

SCHEMATIC



MATERIAL SPECIFICATIONS

ITEM	PART NAME	MATERIAL	FINISH
A	Knob	PC	Black
B	Frame	Steel Strip	Zn Plated
C	Terminal Base	Phenolic Resin	Black
D	Terminal	Copper Stri	Ag Plated Over Ni Plated
E	Contact	Copper Strip	Ag Plated
F	Spring Plate	PBS Strip	Natural
G	Spring Plate	PBS Strip	Natural

比例 SCALE 1 : 2

單位 DIMENSION mm

DO NOT SCALE DRAWING
TOLERANCES UNLESS OTHERWISE

UP TO 10 ± 0.3
ABOVE 10 TO 100 ± 0.5
ABOVE 100 ± 0.8
ANGULAR DIMENSIONS $\pm 5^\circ$

品名 TITLE Slide Switch

型號 MODEL 5069

繪圖 LEE

版次 REVISION A

核准 APPROVED

日期 DATE

HSK

2019/4/25

大 廣 有 限 公 司
DA KOANG CO., LTD.