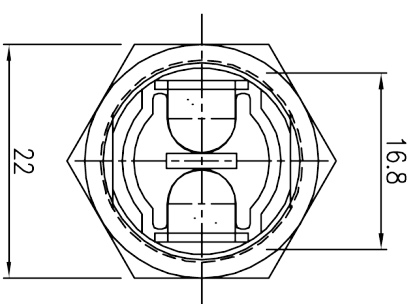
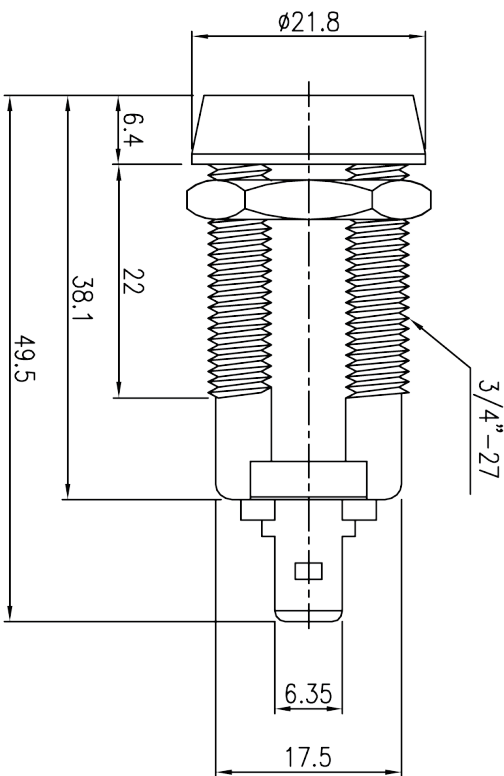
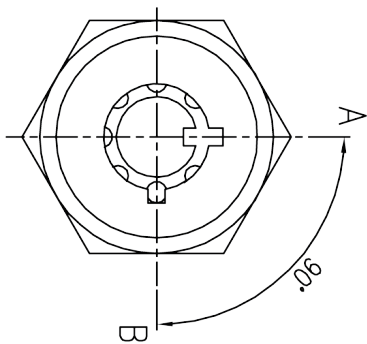


Recommended hole size

NOTES:

- * Zinc alloy die cast housing and cylinder, chrome plated.
- * Radial 7 pin tumblers mechanism.
- * Steel made tubular keys, nicel plated.
- * 2 Positions (off-on).
- * Silver plated contacts and terminals.
- * Rating: 4A 125VAC, 2A 250VAC.
- * Met with ROHS.

REV. NO.	COORDINATES	WAS	NEW	DATE	BY
1					
2					
3					
4					
5					
6					
7					
8					

DATE	03.30.09	SCALE	2:1	UNIT	mm	WT. : g	REV. : A	DESCRIPTION	KEYLOCK SWITCH
TOLERANCES	±0.1	±0.05	±0.02	±0.01	±0.005	±0.002			
APPROVED BY		CHECKED BY		DRAWN BY		PART NO.	5057B		
MATERIAL						NOTE			

大廣有限公司 DAKOANG CO., LTD.