
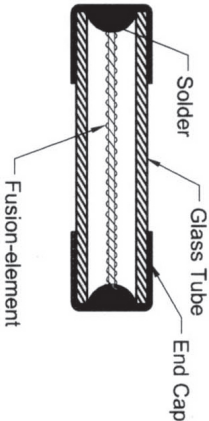


Dimensions in mm

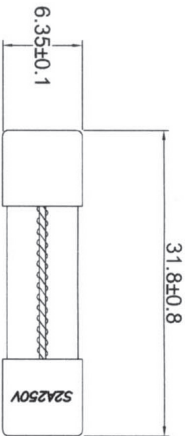

Rated Current	Breaking capacity	Rated Voltage
63mA	@125V/AC 10KA @250V/AC 35A	125V/250V
80mA		125V/250V
100mA		125V/250V
125mA		125V/250V
160mA		125V/250V
200mA		125V/250V
250mA		125V/250V
300mA		125V/250V
315mA		125V/250V
400mA		125V/250V
500mA	@125V/AC 10KA @250V/AC 100A	125V/250V
600mA		125V/250V
630mA		125V/250V
700mA		125V/250V
800mA		125V/250V
1A		125V/250V
1.25A		125V/250V
1.5A		125V/250V
1.6A		125V/250V
2A		125V/250V
2.5A	@125V/AC 10KA @250V/AC 100A	125V/250V
3A		125V/250V
3.15A		125V/250V
3.5A		125V/250V
4A		125V/250V
5A		125V/250V
6A		125V/250V
6.3A		125V/250V
7A		125V/250V
8A		125V/250V
10A	@32V/AC DC 1000A	125V/250V
12A		32V
13A		32V
15A		32V
16A		32V
20A		32V
25A		32V
30A		32V

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM						CUSTOMER NO.		大 廣 有 限 公 司 DA KOANG CO., LTD.
TOLERANCE						DRAWN BY JAMIE		
DECIMALS X ± 0.5						ANGULAR ± 2°		
XX ± 0.25 DO NOT SCALE DRAWING						CHECKED BY		
 						APPROVED BY		TITLE Miniature Cartridge Fuse6.35x32mm Slow Blow Type
MATERIAL						DATE 2006.06.01		
REV 1.4						SCALE		
PART NO. 2086A						DRAWING NO. AA05062111		
Rated Current		100%	135%	200%				
In	Min.	Max.	Min.	Max.				
100mA-30A	4 h	3600 S	3 S	120 S				