
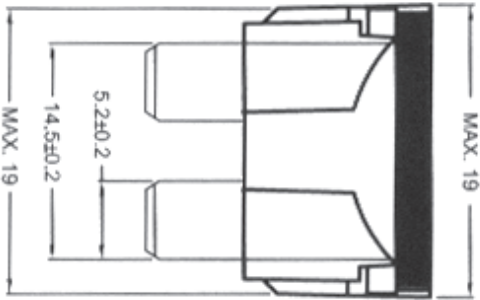


Rated Current (A)	Body Color	Rated Voltage	Voltage Drop
1	Black	32V	250mV
2	Gray		225mV
3	Violet		200mV
4	Pink		175mV
5	Tan		150mV
7.5	Brown		140mV
10	Red		125mV
15	Light Blue		120mV
20	Yellow		120mV
25	Natural (White)		120mV
30	Green		120mV
35	Purple		120mV
40	Orange		120mV

Electrical Characteristics

% of Rated Current	Operating Time
110%	> 100 h
135%	0.75 ~1800 s
200%	0.15~5 s
350%	0.04~0.5 s
600%	0.02~0.2 s

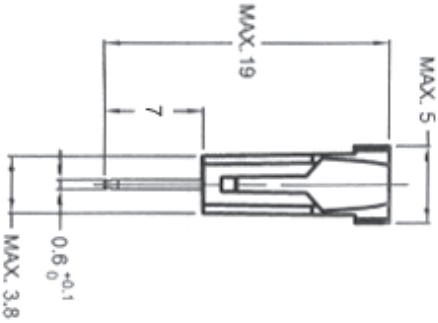

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCE DECIMALS ANGULAR X ± 0.5 ± 2° XX ± 0.25 DO NOT SCALE DRAWING		CUSTOMER NO.		大廣有限公司 DA KOANG CO., LTD.	
DRAWN BY JANE		CHECKED BY 蔡文和		TITLE Blade Fuse	
DATE 2009.06.29		APPROVED BY		PART NO. 2101	
SCALE				DRAWING NO. BA04050800	
P/N	B				
REV					