
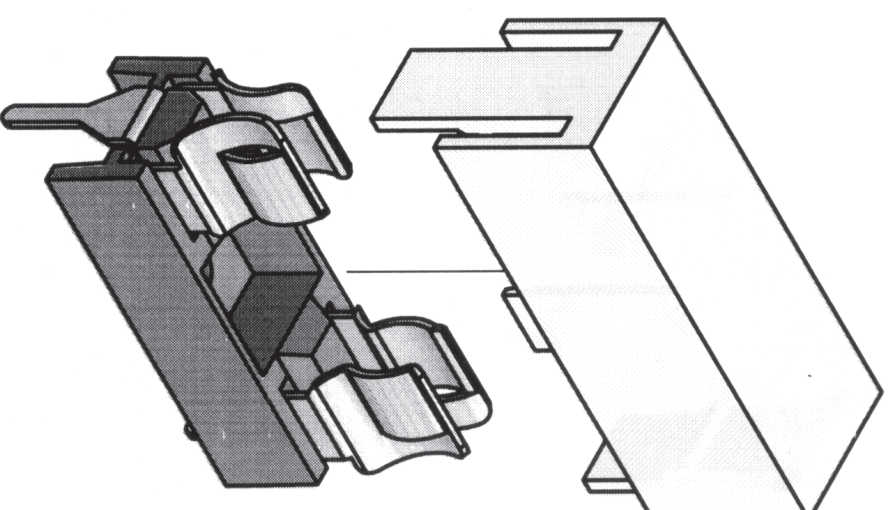
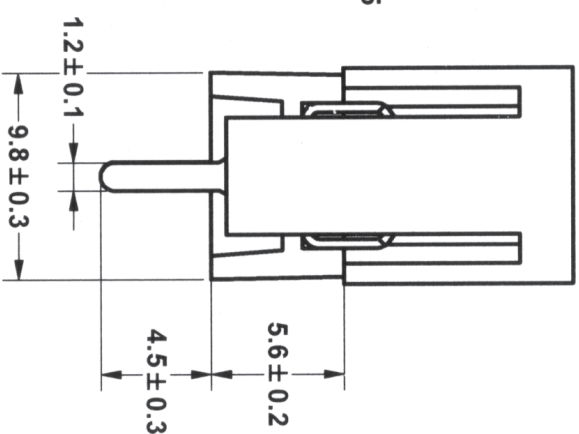
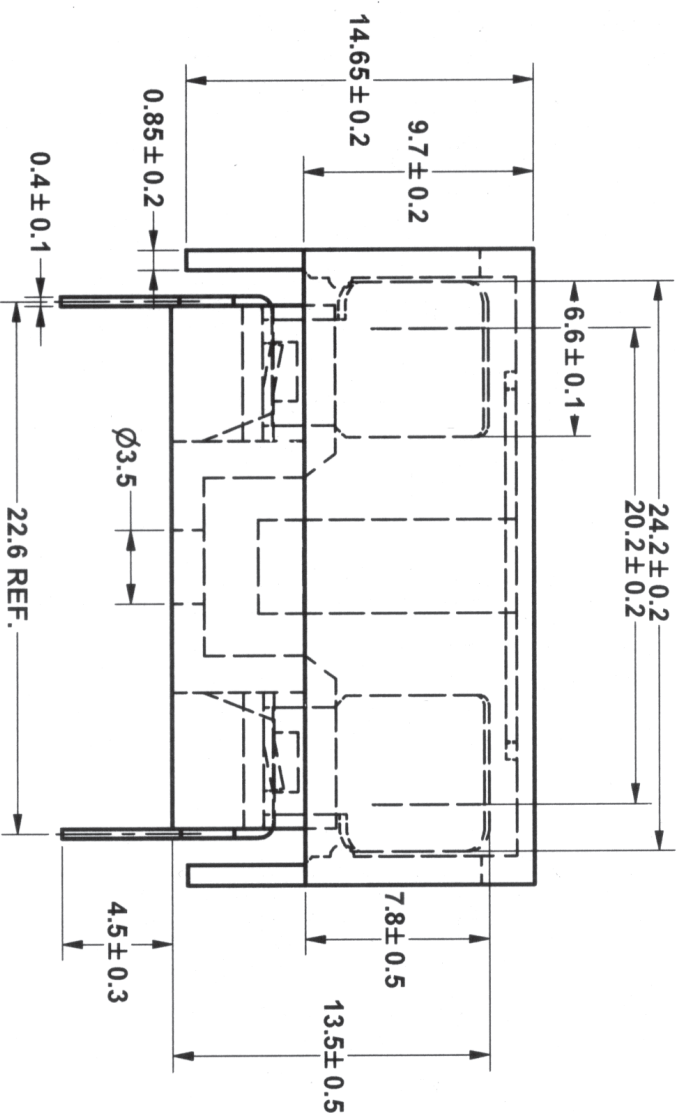


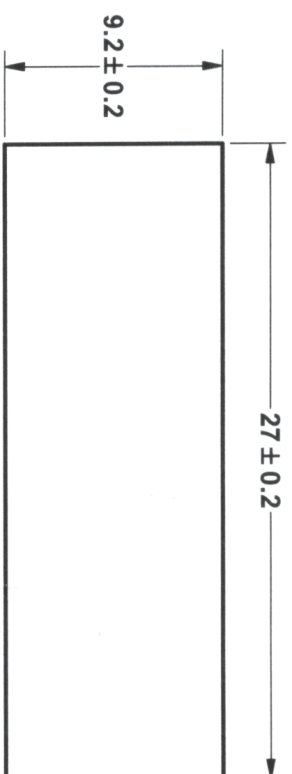

Electrical Characteristics:

Nominal Current/Voltage: 6.3A 250V

Operating Power: 1.6W

Contact Resistance: <5mΩ

Insulation Resistance: >100MΩ

Dielectric Strength: >3000Vac/60sec.

Material:

Insulation Body: Nylon+Glass fiber UL 94 V0

Insulation Cover: PC

Contact Fuse Clip: Brass Tin Plated

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCE			CUSTOMER NO.		大 廣 有 限 公 司 DAKOANG CO., LTD.	
DECIMALS X ± 0.5	ANGULAR ± 2	DO NOT SCALE DRAWING	DRAWN BY JANE	CHECKED BY	TITLE 5.2X20mm Fuse Block	
			APPROVED BY 		PART NO. 2183	
P/N			DATE 2009/4/7		DRAWING NO. AA05011901	
REV	B		SCALE			