


大廣有限公司
DA KOANG CO., LTD.


產品規格圖

Product specification chart

成品圖示

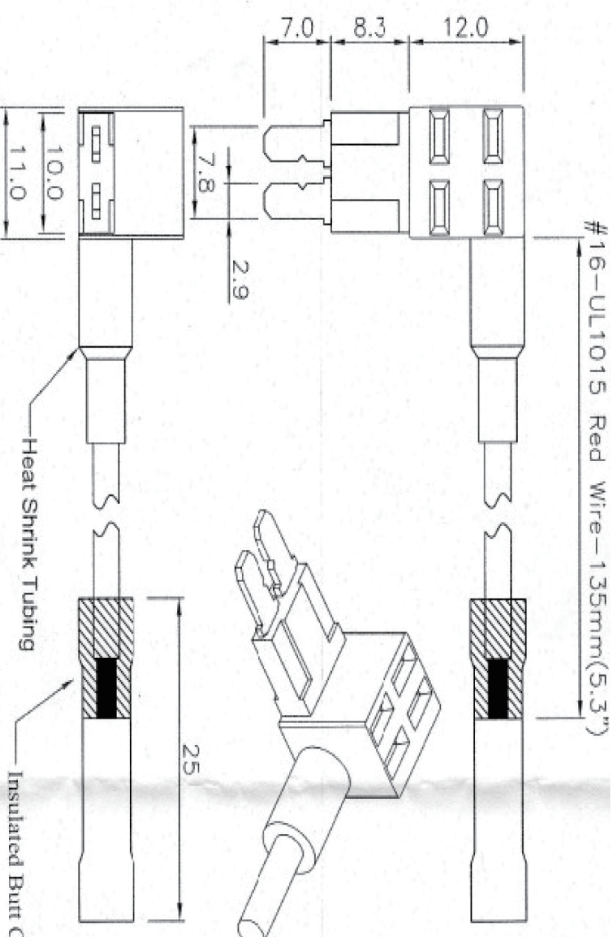

SPECIFICATIONS :
 Suitable Rated Current : MAX. installation Rating up to 20A.
 Dielectric Strength for 60 seconds : AC1500V Min.
 Insertion & Extraction Force : 1Kg. Min.
 Contact Resistance at 1A DC : 5mΩ Max.
 Insulation Resistance at 500V DC : 100MΩ Min.
 Voltage Drop : 20mV Max.
 Temperature Rise : 50°C Max.
 Molded Parts : Nylon PA66 UL 94V-0
 Terminals : Brass with Tin Plated
 Suitable Wire Gauge : #16 AWG UL 1015

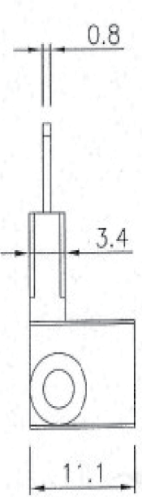

Tolerances : Unless Otherwise Specified		
Dimension	Critical To Function	General
< 1	+/-0.02	+/-0.03
1 ~ 8	+/- 0.1	+/- 0.2
8 ~ 24.995	+/- 0.15	+/- 0.25
25 ~ 99.99	+/- 0.2	+/- 0.3
Angles	+/- 1°	+/- 5°

Scale : mm

Document name	Document number	Formulation date	Edition	Manufacture	Verification	Approving
文件名稱 MICRO II FUSE	文件編號	制定日期	版本/版次	製作	審核	核准
HOLDER-battery	2260	2014.06.30	A/E	Luo	MANDY	J.B. Jaw
Link						
Material quality				PA-66 Nylon 尼龍 材質 磷銅. 青銅. 鍍錫		
Unit 單位				mm		
Error 誤差				± 0.2		