


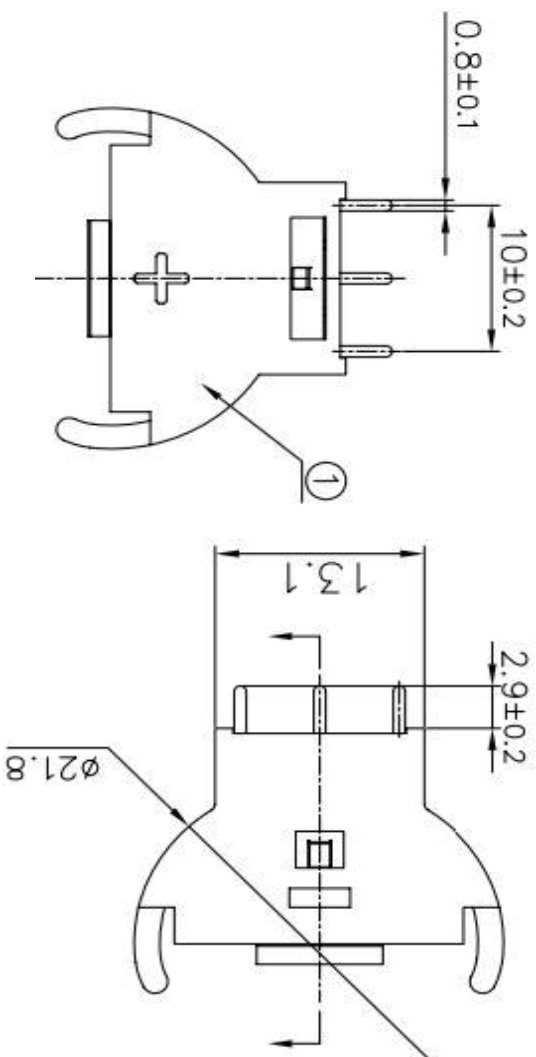

NOTE:

1. MATERIAL:

a. HOUSING: THERMOPLASTIC GLASS FIBRE UL94V-0

b. CONTACT: PHOSPHOR BRONZE

(SURFACE PLATING: Ni 100u")

SEE ORDERING INFORMATION





2. ELECTRIC:

a. CONTACT RESISTANCE: 30 MILLIOHMS MAX

b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN

c. DIELECTRIC VOLTAGE: 750V AC ONE SEC LEVEL

d. OPERATING TEMPERATURE: -55°C ~ +85°C

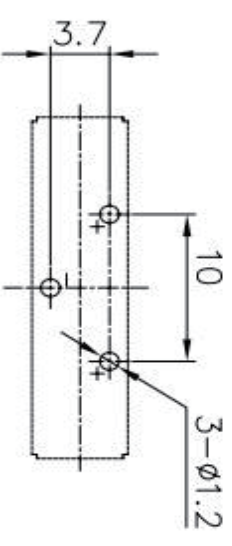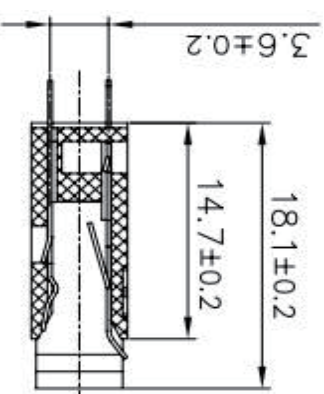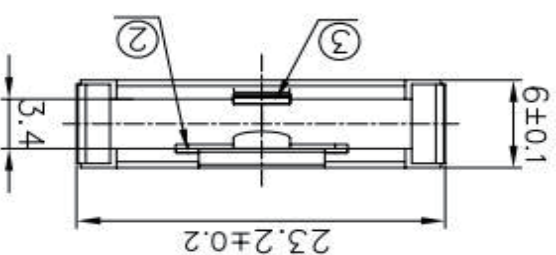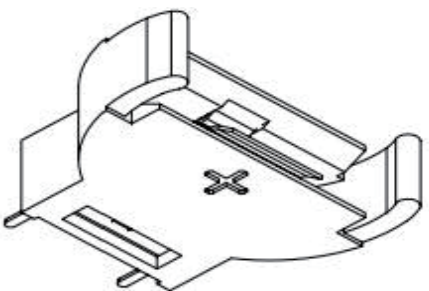

PCB Holes Diagram
Top View



Battery Holder

Cell Size: 20mm Battery Reference: CR2032

Material: PBT Phosphor Bronze Finish/Plating: Tin-Nickel

大廣有限公司 DA KOANG CO., LTD.

PART NO:

3414