NOTES:

1.插拔力：
1.1 插入力：2.0~3.0 kgf
1.2 拔出力：4.0~8.0 kgf

1.INSERTED/TENSILE FORCES：
1.1 INSERTED FORCE：2.0~3.0 KGF.
1.2 TENSILE FORCE：4~8 KGF.



SECTION：A-A



SECTION：B-B

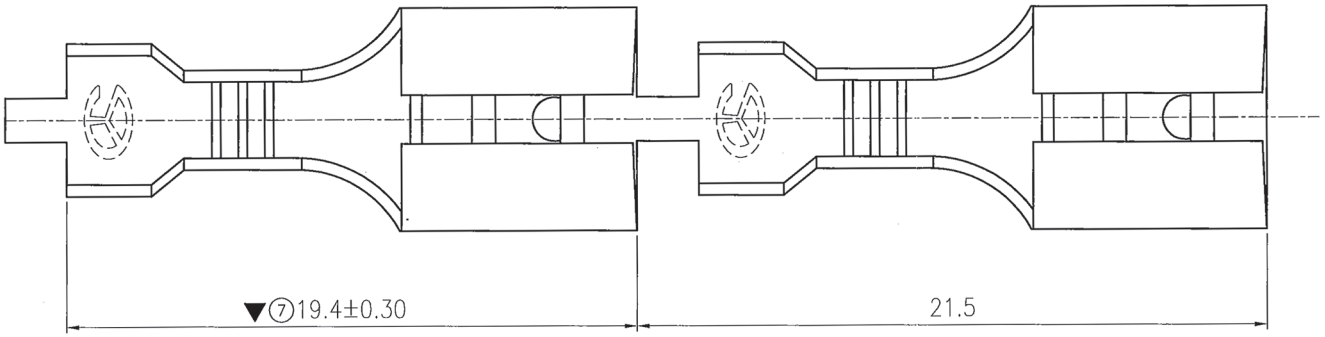

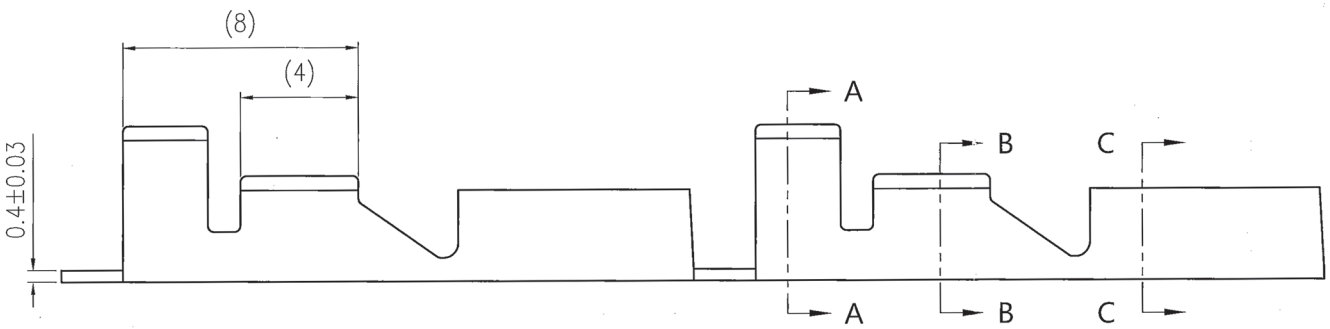



SECTION：C-C

RoHS

REV.	工程變更記錄 ECN HISTORY	日期 DATE	更改者 DWN	審查 CHECK	核准 APP. BY
5	ECR:180311	2018/4/10	蘇懇純	Philip 2015/12/10	CYJ 2015/12/11
4	尺寸修改及更換圖框	2015/12/10	吳翰禎	林俊逸 2015/11/18	CYJ 2015/11/18
3	增加視圖	2015/11/18	JEN	林俊逸 2012/7/24	CYJ 2012/7/25
2	版面更新	2012/7/24	KIM	林俊逸 2013/5/28	CYJ 2013/5/29
1	NEW(新發行)	2013/5/28	KIM		

比例/SCALE 1:1
圖紙/SIZE A3
THIRD ANGLE PROJECTION

管制符號 QUALITY SYMBOLS: ▼ = 7; ▽ = -; ○ = 7; ★ = -; 版本REV. 5

一般公差 GENERAL TOLERANCE

<1.0	±0.10
1.0~5.0	±0.15
5.0~10.0	±0.20
10.0~20.0	±0.25
>20.0	±0.30
( )	ref.
angle	±3°

DIMENSION IN [MM] INCH

		DATE
DRAWN BY	KIM	2014/09/12
CHECKED BY	THOMAS	2014/09/12
APPROVED BY	CYJ	2014/09/12

DOC. NO. S-804402-51

大 廣 有 限 公 司 DA KOANG CO., LTD.

編號/PART NO. 3245-1A

品名/PART NAME 250-8高 250-TYPE FEMALE TERMINAL

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF CY PRECISION IND. CO., LTD. WITHOUT THEIR CONSENT IT MAY NOT BE REPRODUCED OR GIVEN TO THIRD PARTIES.

SHEET NO. 1 OF 1
RD-3001-01A