


REVISIONS			
REV	DESCRIPTION	DATE	BY

Product safety certification through the following.

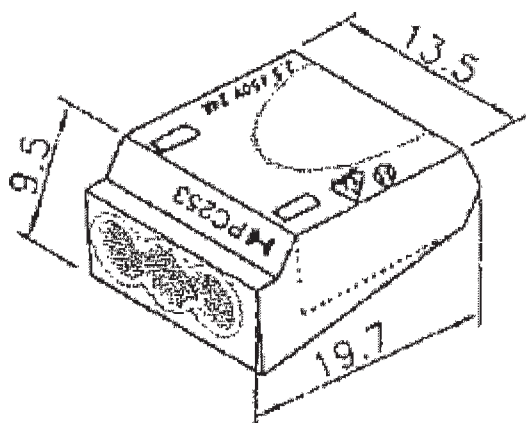

NOTE: Current: 24A (VDE)
Voltage: 600V (UL)
Working Temp: 110°C
Wire Range: #12-22 AWG Solid conductor
Stripping Length: 11 mm (0.43 inch)

康揚符合歐盟ROHS規範 (K.Y. Accord EU RoHS Compliant)

★鉛Pb	<1000PPM
★鎘Cd	< 100PPM
★汞Hg	<1000PPM
★六價鉻Cr6+	<1000PPM
★多溴聯苯類PBBs	<1000PPM
★多溴聯苯醚類PBDEs	<1000PPM
★有鹵料件 Halogen-containing Product	

大 廣 有 限 公 司 DA KOANG CO., LTD.				TITLE PUSH-IN WIRE CONNECTOR	SPEC. DWG.
				MATERIAL PA 66 UL94V-2	DATE 2001.11.20
				FINISH	DRAWN SCOTT
				COLOR ORANGE	CHECK
PART NUMBER 9351	DRAWING NUMBER 9351			UNLESS OTHERWISE SPECIFIED TOLERANCE ±0.5	APPROVED
SIZE A4	SCALE NONE	UNIT mm	REV A		