


REVISIONS			
REV	DESCRIPTION	DATE	BY

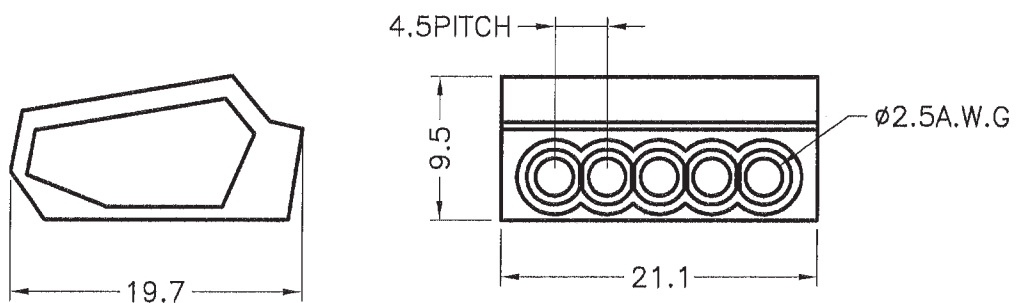

- NOTE: 1. CURRENT: 24A (VDE)
 2. VOLTAGE: 600V
 3. WORKING TEMP.: 105°C
 4. WIRE RANGE: #22~#12 AWG SOLID CONDUCTOR

符合歐盟ROHS規範 (RoHS Compliant)	
★ 鉛Pb	<1000PPM
★ 鎘Cd	< 100PPM
★ 汞Hg	<1000PPM
★ 六價鉻Cr6+	<1000PPM
★ 多溴聯苯類PBBs	<1000PPM
★ 多溴聯苯醚類PBDEs	<1000PPM
★ 有鹵料件 Halogen-containing Product	

大 廣 有 限 公 司 DA KOANG CO., LTD.				TITLE PUSH-IN WIRE CONNECTOR	SPEC. DWG.
				MATERIAL PA 66 UL94V-2	DATE 2001.11.20
				HARDNESS	DRAWN SCOTT
				COLOR GRAY	CHECK
PART NUMBER 9353	DRAWING NUMBER 9353		UNLESS OTHERWISE SPECIFIED TOLERANCE ±0.5		
SIZE A4	SCALE 2:1	UNIT mm	REV A	APPROVED 	