
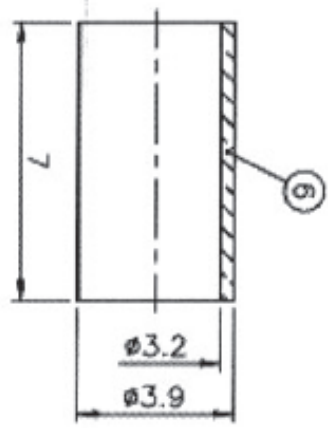
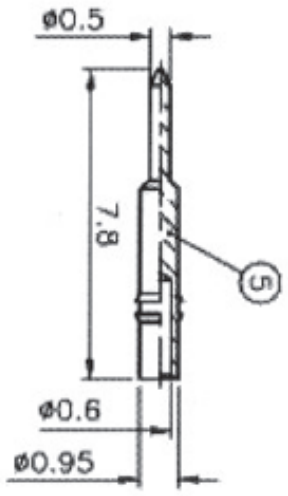
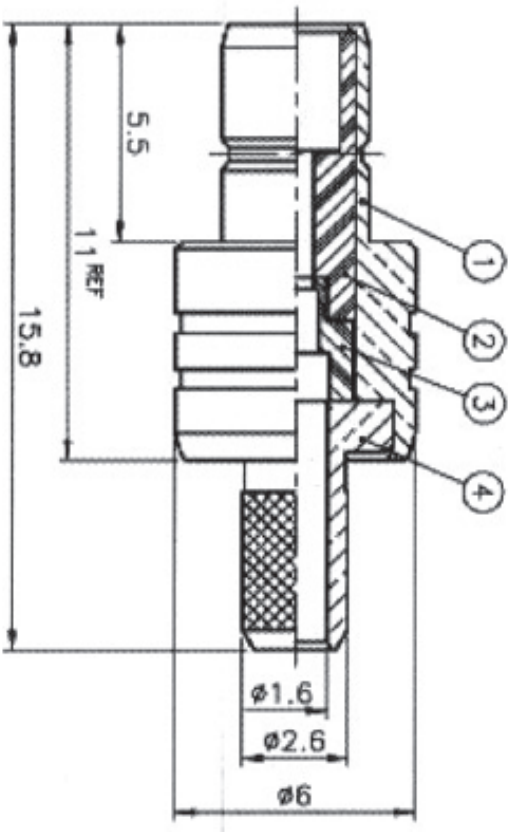


ISS SYMBOL	DESCRIPTION/DATE
------------	------------------

REMARK: ROHS REQUIREMENT APPLIED
(符合 RoHS)

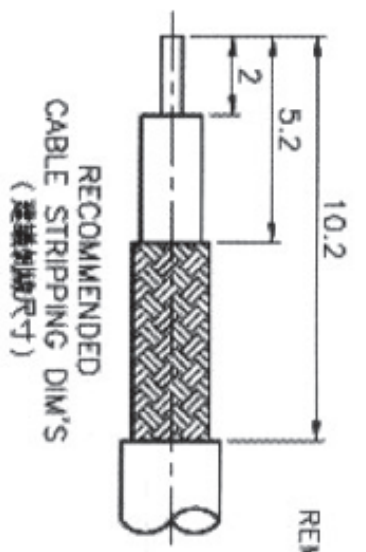

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
 2. GOLD PL 5 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 4. TETLON MIL-P-19468
 5. BRASS JIS H 3250, C 2700

1. CRIMPED FERRULE
HEX CRIMP SIZE .128" (3.25mm)
(套管壓接工具)
2. CONTACT PIN TO SOLDER
(中心針焊接)

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DRAWING NO.	SCALE	5/1	ISSUE	A1	UNLESS OTHERWISE SPECIFIED (一未註明) DIMENSIONS ARE IN MILLIMETERS TOLERANCES 0.5~4 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~515 = ±1 >515~1000 = ±1.6 ANGLES(角度) = ±5°	PART NO.	APPROVED	DATE	TITLE
6	FERRULE	NOTE 5	NOTE 2	1	C06-QB2GB02								07/05/06	大廣有限公司 DAKOANG CO., LTD. SMB CRIMP JACK (FOR 174/U,188A/U,316/U) DRAWING NO. 1422A
5	CONTACT PIN	NOTE 1	NOTE 3	1	C01-181RGE						CHECKED	DATE	07/05/06	
4	BRAID HOLDER	NOTE 1	NOTE 2								DRAWN	DATE	07/05/06	
3	INSULATOR	NOTE 4	WHITE	1	H9102-BGTG002									
2	INSULATOR	NOTE 4	WHITE											
1	BODY	NOTE 1	NOTE 2											
FILE NO.	Z:\線線\BJ91\BJ9102BGTG002-A1R													