
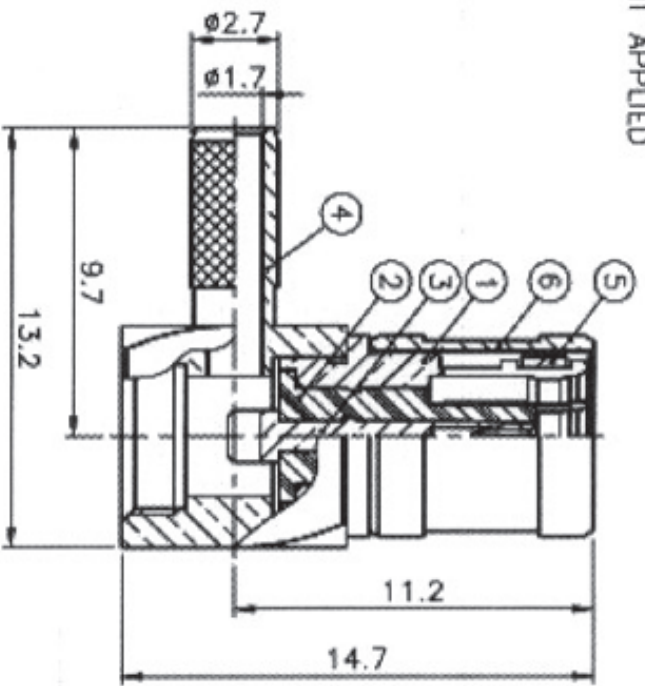
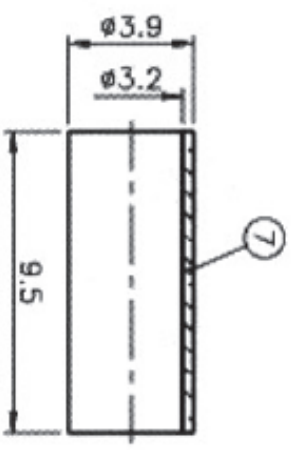


REVISIONS	
ISS	SYMBOL
DESCRIPTION\DATE	

REMARK: RoHS REQUIREMENT APPLIED
(符合 RoHS)

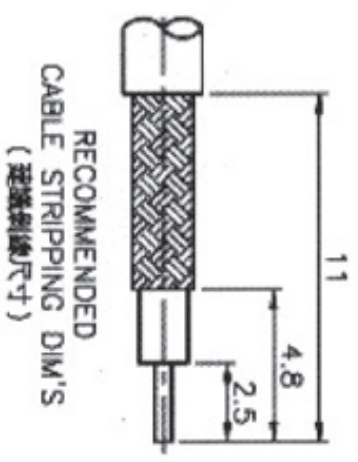

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. GOLD FLUSH OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. BERYLLIUM COPPER PER QQ-C-530
6. BRASS JIS H 3250, C 2700
7. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE

9	NUT	NOTE 1	NOTE 2	1	C05-049RCF
8	SPACER	NOTE 4	WHITE	1	C04-217
7	FERRULE	NOTE 6	NOTE 2	1	C06-079C01
6	SHELL	NOTE 1	NOTE 2		
5	C RING	NOTE 5	NONE		
4	BRAID HOLDER	NOTE 1	NOTE 2		
3	CONTACT PIN	NOTE 5	NOTE 3	1	H9104-BGTGD
2	INSULATOR	NOTE 4	WHITE		
1	BODY	NOTE 1	NOTE 7		
NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES

(一級公差)

- 0.5~6 = ±0.2
- >6~30 = ±0.4
- >30~120 = ±0.6
- >120~315 = ±1
- >315~1000 = ±1.6
- ANGLES(角度) = ±5°

PART NO.

APPROVED

CHECKED

DRAWN

DATE

DATE


DATE

大廣有限公司 DA KOANG CO., LTD.

TITLE
SMB R/A CRIMP PLUG
(FOR RG-174/U, 188A/U, 316/U)

DRAWING NO.
1423A

FILE NO. Z:\產品圖\B9\B9104BGTGD-A1R

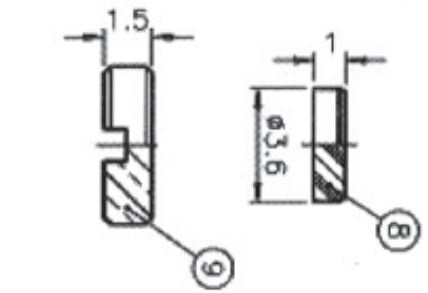

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
(六角壓接工具)
2. CONTACT PIN TO SOLDER
(中心針焊接)