
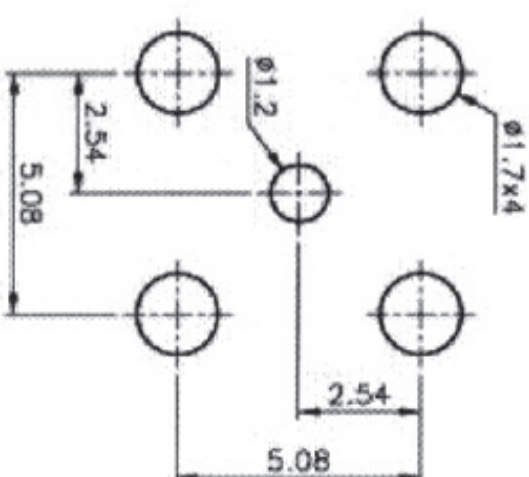
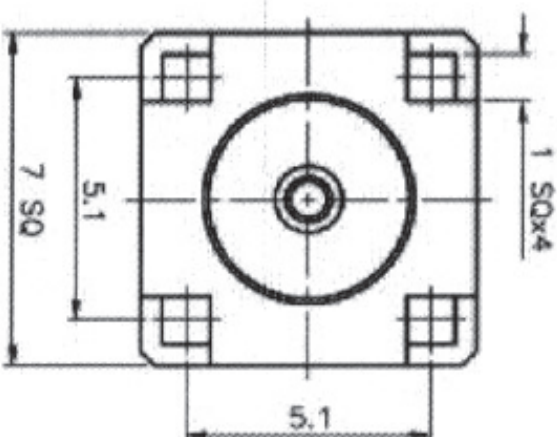


REVISED	
ISS	SYMBOL
DESCRIPTION\DATE	

REMARK: RoHS REQUIREMENT APPLIED
(符合 RoHS)

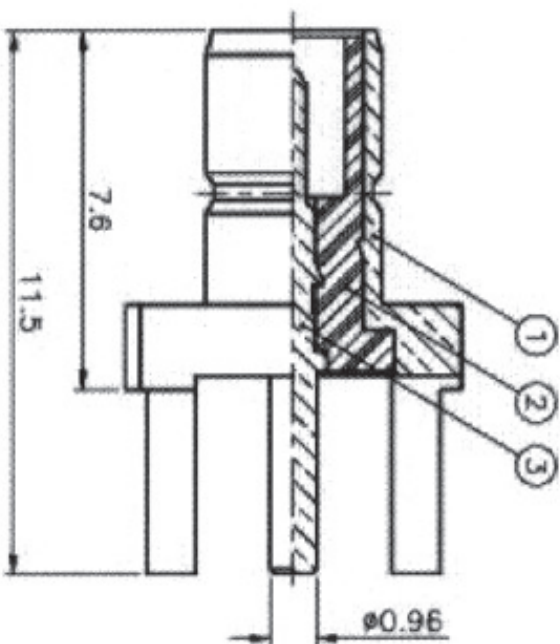

P.C.B. LAYOUT
(印刷电路板配置)

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-8-626
2. GOLD PL 5 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468

							DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES (—公差—) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°			PART NO.		大 廣 有 限 公 司 DAKOANG CO., LTD.
							APPROVED DATE 12/02/05					
3	CONTACT PIN	NOTE 1	NOTE 3	1	CP91-005-001RGE		CHECKED DATE 12/02/05		TITLE SMB PCB MOUNT JACK			
2	INSULATOR	NOTE 4	WHITE	1	NS91-005-001		DRAWING NO. 1427A					
1	BODY	NOTE 1	NOTE 2	1	BD91-006-001RGB		DATE 12/02/05		FILE NO. Z:\客圖\8/9\8/91108DTC-A2R			
NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DRAWING NO.	SCALE	8/1	ISSUE	A2			