


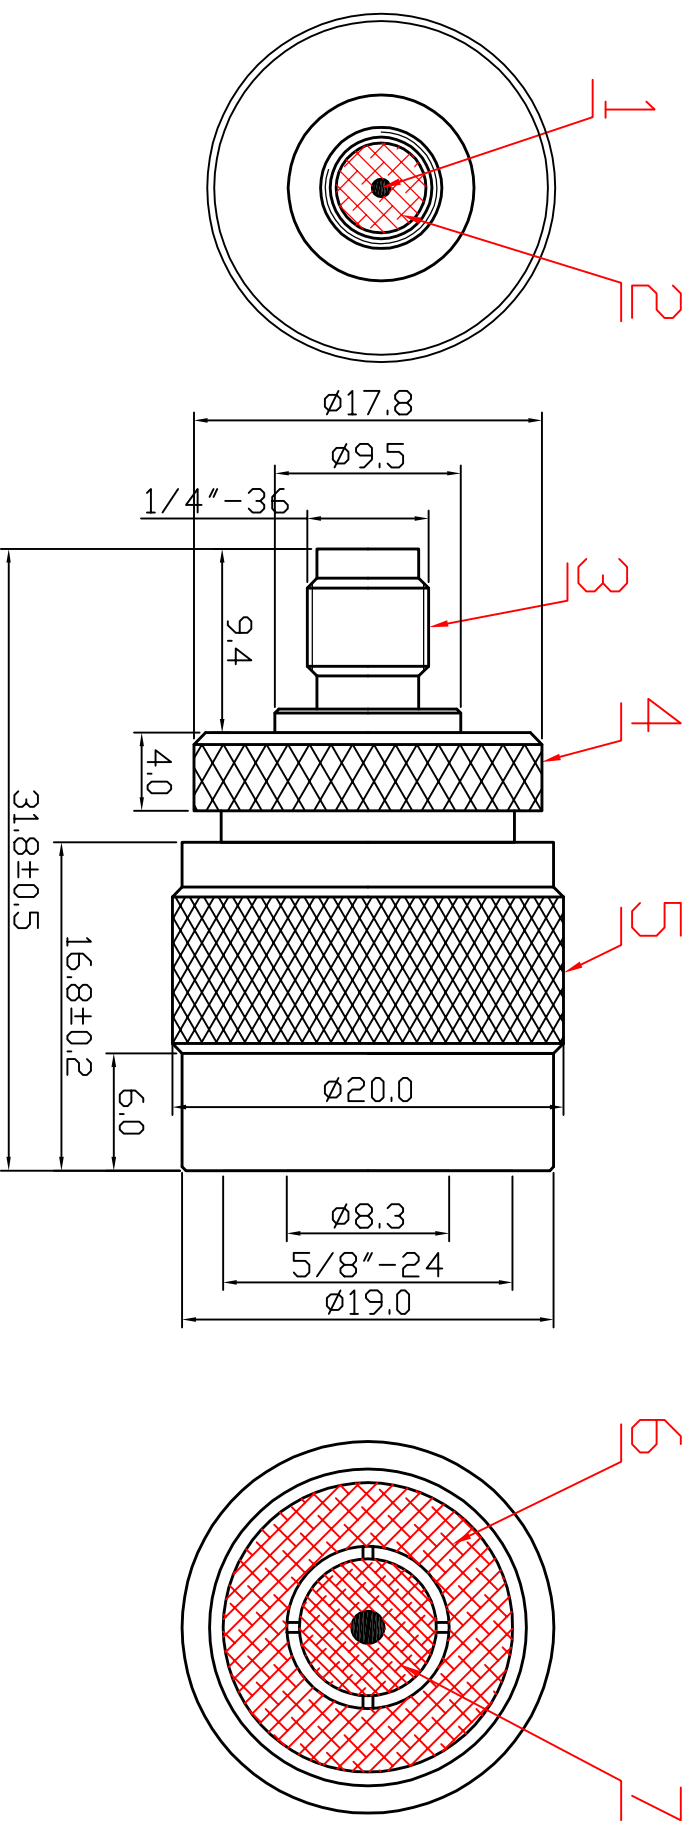

7	INSULATOR	POM	ELECTRICAL CHARACTERISTIC					
6	RUBBER BAND	RUBBER	①	CONTACT RESISTANCE: $\leq 10m\Omega$				
5	SHELL	BRASS	②	INSULATION RESISTANCE: $\geq 20M\Omega$				
4	BODY	BRASS	③	WITHSTAND VOLTAGE: DC500V				
3	FEMALE PART	BRASS	④	CURRENT RATING: 0. 5A/DC300V				
2	INSULATOR	TEF	⑤	OPERATING TEMPERATURE: $-250^{\circ}C \sim 80^{\circ}C$				
1	PIN	BRASS	TOLERANCE		SIGNATURES		DATE	
ITEM	DESIGNATION	MATERIAL	0 - 10 10 - 99 100 - 999 1000 - 9999 10000 - 99999		±0.05 ±0.5 ±1.0 ±10.0 ±100.00		DRAFT: 胡功学 05. 04. 13	
REV.	ECO	PART NO.	DATE	BY	CHECKED:			
A0	1463				APPROVAL:			
B					SHEET		SCALE UNIT REV.	
			OF		/		mm ∅	
					TITLE		SMA FEMALE TO N MALE	
					CUSTOMER			
大 廣 有 限 公 司 DA KOANG CO., LTD.								