


NEON LAMP WITH WIRE TERMINAL

NE-2C	SEMIN-HIGH BRIGHTNESS
DIA	T3.8, T6

110V 加電阻 68K~150K 都可以
 220V 加電阻 220K
 380V 加電阻 360K
 只適合AC用

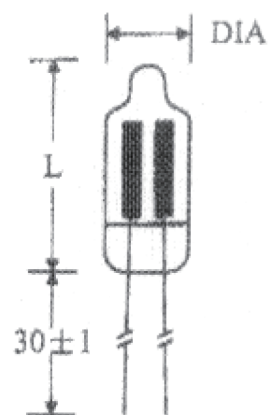

CODE NO.	BULB DIA. (mm)	BULB LENGHT (mm)	START VOLTAGE (MAX)		GLOW DISPERSION PERCENT (MINI)	DESIGN CURRENT (mA)	CIRCUIT VOLTAGE	SERIES RESIST-ANCE (K OHM)	USEFUL LIFE (Hrs)
			AC	DC					
8048	3.8	9.5 MAX	60	90	85	0.7	110V	68	20,000
8013A	6	16±1	60	90	85	1.0	110V	47	20,000
8013C	6	12±1	60	90	85	1.0	110V	47	20,000

CAUTION OF USING NEON LAMPS: AJUST RESISTANCE FOR SETTING DISCHARGE CURRENT AS FIXED STANDARD. NEON LAMPS WITH ATTACHED RESISTORS ARE AVAILABLE AS PER CUSTOMERS' SPECIFICATION.

大 廣 有 限 公 司 DA KOANG CO., LTD.