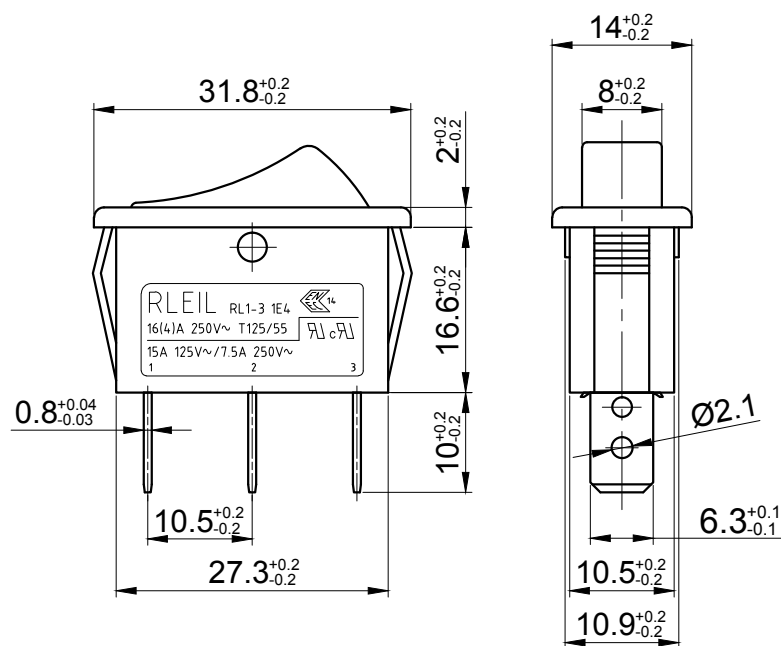



MATERIALS

1. HOUSING: Nylon #66 UL 94V-2
2. ROCKER: PC UL 94HB
3. TERMINAL: Copper Alloy Ag plated
4. CONTACTOR: $\text{AgSnO}_2\text{In}_2\text{O}_3(10)/\text{Cu}$

SPECIFICATION

1. RATING: UL C-UL: 15A 125VAC/7.5A 250VAC
ENEC:
16(4)A 250VAC T125/55 1E4
2. CIRCUIT: ON-OFF W/Lamp SPST 3P
3. CONTACT RESISTANCE: 30m OHMS Max
4. INSULATION RESISTANCE: DC500V 100M OHMS Min
5. WITHSTAND VOLTAGE: AC 1500V 1 Minute
6. ELECTRICAL LIFE: 10000 Cycles at Full Load
7. OPERATION FORCE: 500~700gf
8. OPERATION TEMPERATURE RANGE: $-25\sim+125^{\circ}\text{C}$

PANEL HOLE SIZE

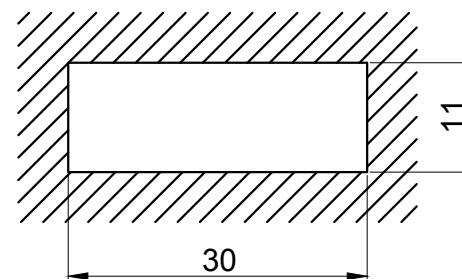

大 廣 有 限 公 司 DA KOANG CO., LTD.						5082A Series	
设计 签名 年月日 标准化 签名 年月日 绘图 符辉 18.05.26 审核 张雪飞 工艺 批准						TITLE	SERIES
						ROCKER SWITCH	FUNCTION
							ON-OFF W/Lamp
							VIEWS TYPE
						