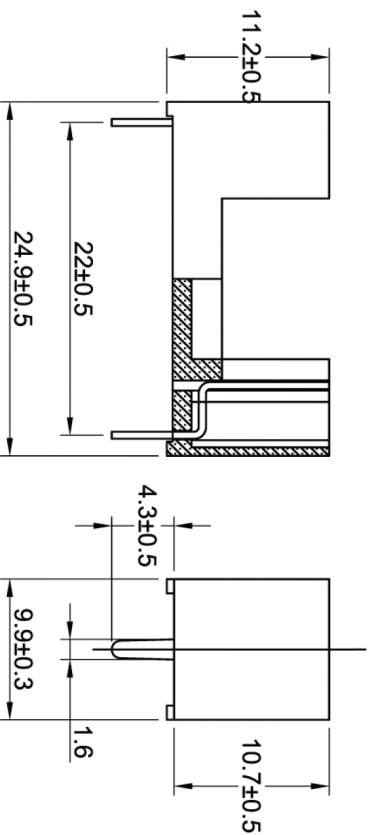
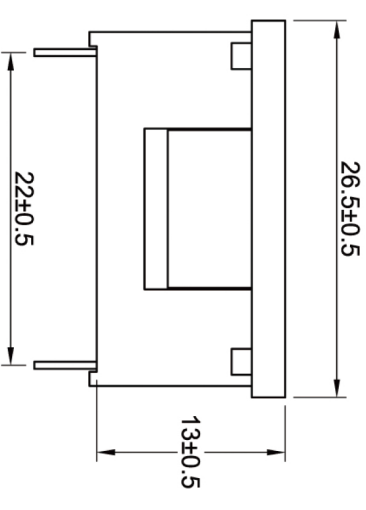
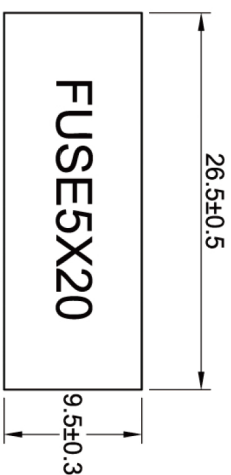
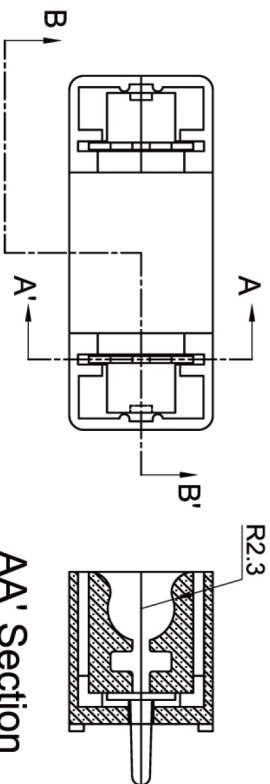


BB' Section

Characteristics:

Insertion & Extraction Force Min. 1Kg
 Dielectric Strength Min.AC500V For 60 seconds
 Electrical Rating: 6.3A 250V
 Insulation Resistance At 500V dc Min. 100M Ohms
 Temperature Rise max. 50° C
 Max. Voltage Drop: 20mV

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM		CUSTOMER NO.		大 廣 有 限 公 司 DA KOANG CO., LTD.	
TOLERANCE		DRAWN BY LING			
DECIMALS X ± 0.5	ANGULAR ± 2°	CHECKED BY		TITLE PCB Fuse Block	
DO NOT SCALE DRAWING		APPROVED BY			
		DATE 2005.04.15		PART NO. 2183B	
MATERIAL		SCALE		DRAWING NO. AA05041501	
REV	1.1				