
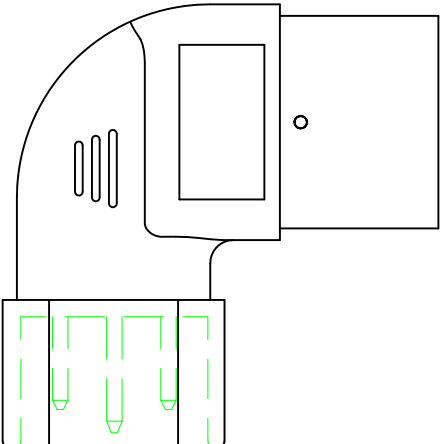
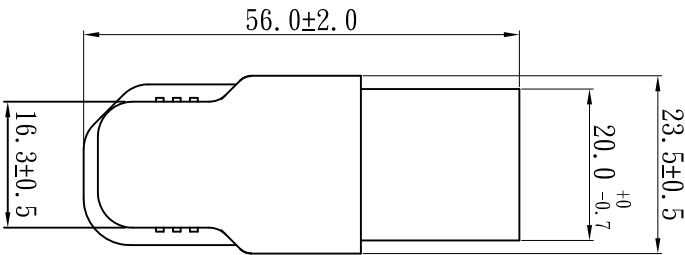
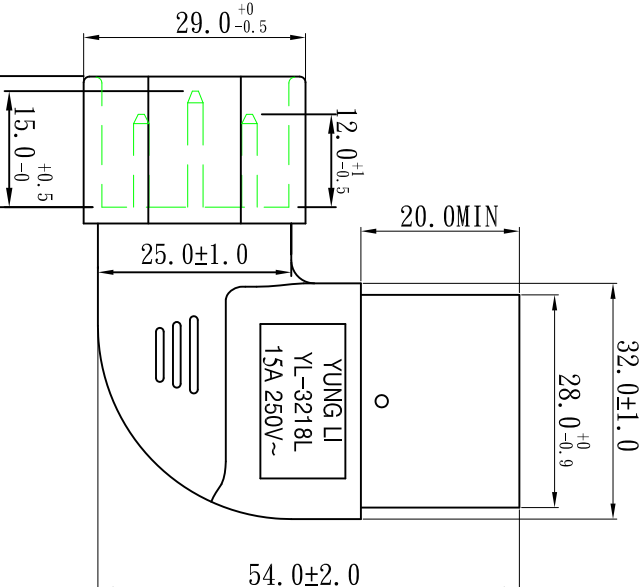
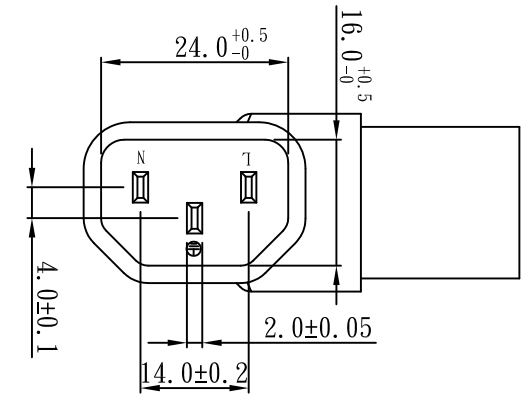


Note:

1.Rating:15A 250V

2.Insulation Resistance:100MΩ

3.Dielectric Voltage:2000V/sec

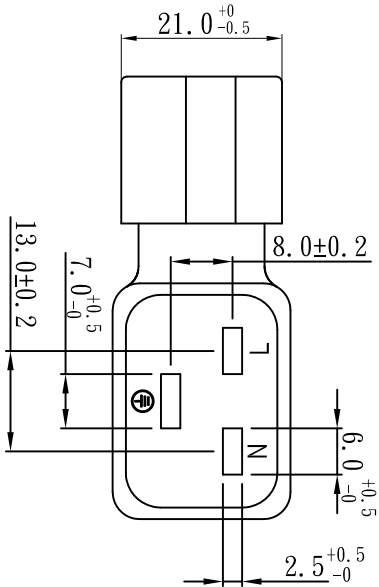

序號	品名規格	用量	備注		1.0-1 57.0±2.0												
1	UL 1015 14AWG	IPC	棕:28	藍:42	綠:38mm												
2	2X4外殼 黑色 無刻字	IPC															
3	銅片:98672BS-1	3PCS															
4	端子:2*6方型母端	3PCS															
5	YC-18內接 白色	IPC															
6	膠料:50P 黑色	46g/PC															
7	小夾鏈帶:110X85X0.06mm	IPC															
核准:						審核:		業務:		大 廣 有 限 公 司 DA KOANG CO., LTD.							
一般尺寸公差: >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle:±1°						制圖	SUKI	日期	22.12.29	客 戶							
						型號	1097B-1			客 戶 料 號							
						圖號	版本	B	材 質	P. V. C						單位: mm	比例: 1:1
						單重(g)											