

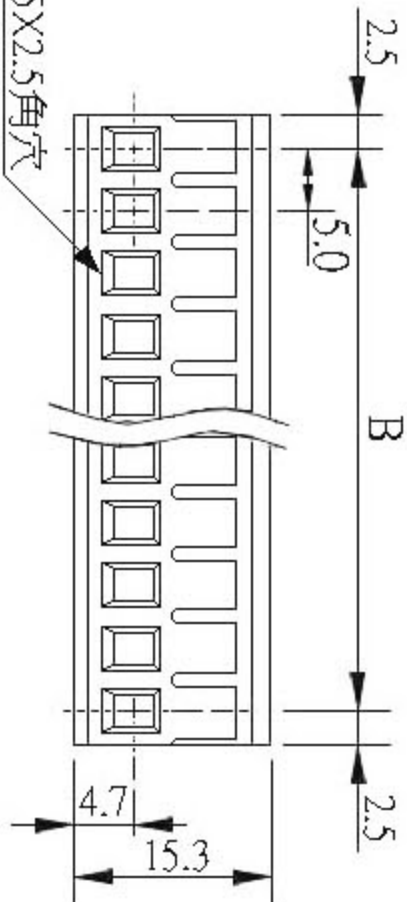
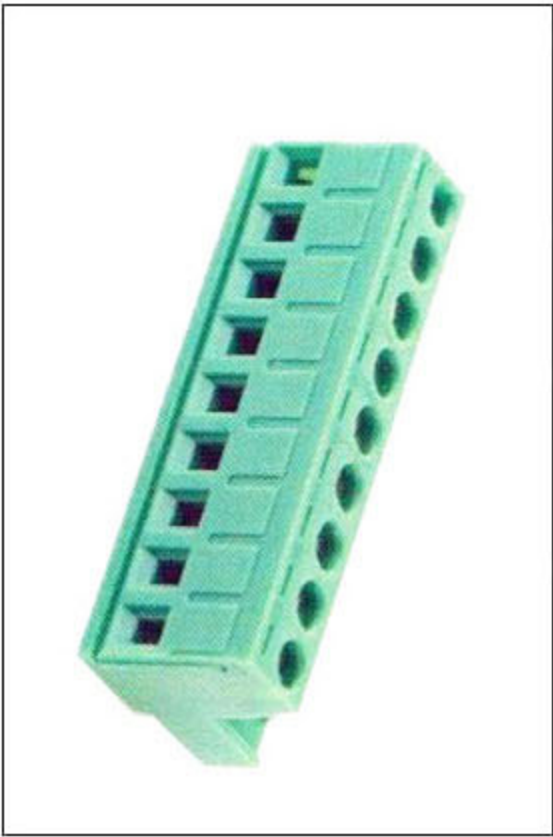


RAV 改版	CHANGE DESCRIPTION 記 錄 說 明	REVISED 修版者	APPROVED 審 核	DATE 日 期

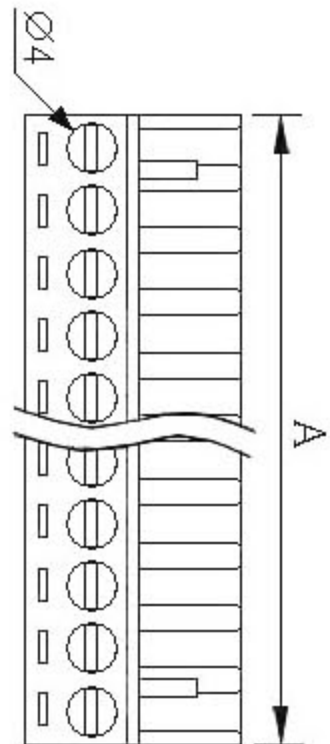

Specifications	
Poles	2P ~ 24P
Wire Range	14 to 24 AWG
Housing	Polyamide 6.6, Green.
Clamping	Phoshor Bronze, 0.4t, Nickel Plated.
Wire Cage	Brass, 0.7t Nickel Plated.
Screw	M2.6, Steel, Nickel Plated.
Insul. Withstands Voltage	AC 2000V/min
Insul. Resistance	500MΩ or More at DC 500V
Using Temperature Range	-40°C ~ +105°C
Screw Torque Value	5kg-cm

PITCH : 5.0 mm DIMENSION : ±0.2 mm

POLE	2	3	4	5	6	7	8	9	10
A	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0
B	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0

POLE	11	12	13	14	15	16
A	55.0	60.0	65.0	70.0	75.0	80.0
B	50.0	55.0	60.0	65.0	70.0	75.0

UNIT	SCALE	大 廣 有 限 公 司 DAKOANG CO., LTD.			
單位	比例				
MM	/				
TOLERANCE 公差		MATL 材料：黃 銅	TITLE 30502		
X.X± 0.1		FINISH 處理：鍍 錫			
X.XX± 0.1		DESIGN 設計：			
ANGLE 角度	°	APPR 核准：	PART NO 料號：	REA 版次	
			DRAW NO 圖號：	A	