


$\varnothing 23^{+0.2}_{-0.2}$

$2^{+0.2}_{-0.2}$


$5^{+0.2}_{-0.2}$

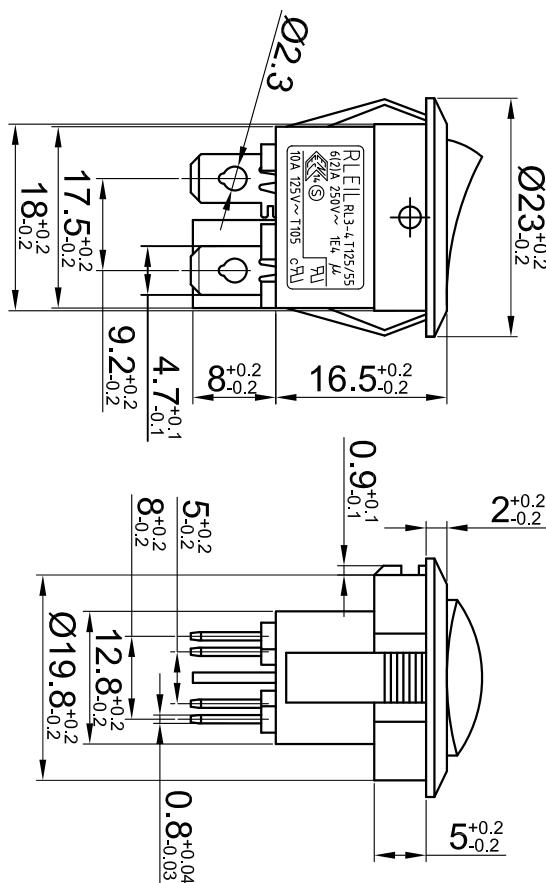

## SPECIFICATION

1. HOUSING: Nylon #66 UL 94V-2
2. ROCKER: PC UL 94HB
3. TERMINAL: Copper Alloy Ag plated
4. CONTACTOR: AgSnO<sub>2</sub>In<sub>2</sub>O<sub>3</sub>(10) / Cu
5. INSULATION RESISTANCE: DC500V 100M OHMS MIN
6. WITHSTAND VOLTAGE: AC 1500V 1 MINUTE
7. ELECTRICAL LIFE: 10000 CYCLES AT FULL LOAD
8. OPERATION FORCE: 600~900gf
9. OPERATION TEMPERATURE RANGE: -25~125°C

## PANEL HOLE SIZE

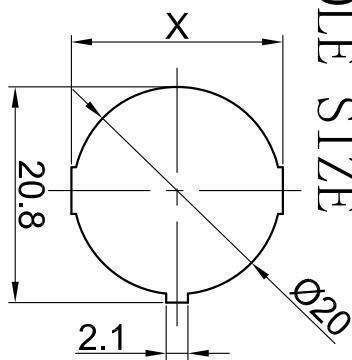

Panel thickness	X
0.75-1.25	20.2
1.25-2.0	20.4
2.0-3.0	20.6

## MATERIALS

1. HOUSING: Nylon #66 UL 94V-2
2. ROCKER: PC UL 94HB
3. TERMINAL: Copper Alloy Ag plated
4. CONTACTOR: AgSnO<sub>2</sub>In<sub>2</sub>O<sub>3</sub>(10) / Cu

大 廣 有 限 公 司				51721A			
DA KOANG CO., LTD.				TITLE			
设计	签名	年月日	标准化	签名	年月日	SERIES	
设计	张雪飞	14.03.15				ROCKER SWITCH	FUNCTION
绘图						ON-OFF W/Lamp	DRAWING NUMBER
审核							
工艺							
张雪飞							
批准							