
PIEZO BUZZER Model:3326A

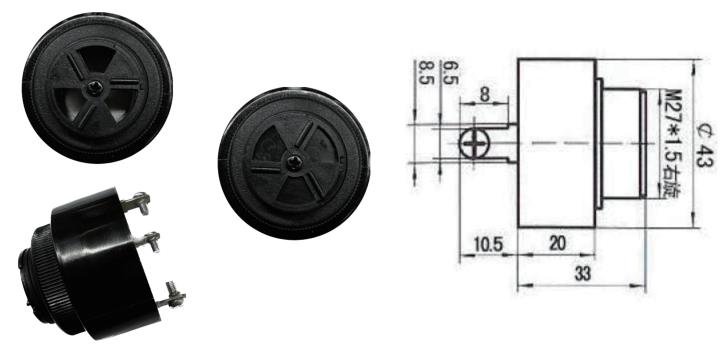

## ELECTRICAL CHARACTERISTICS OF MODEL NO: 3326A

Operation Voltage	12VDC(Typical)
Operation Current(at 12V DC)	<10 mA (Typical)
Sound	Single and Pulse sound
S.P.L(at 100cm)	Min.72dB±2dB ,Max.105±2dB
Operation Frequency	2.9 ± 0.5 KHz
Continue Operation Test	Over 4 hours (at 12 VDC)
Housing Material	ABS
Operation Temperature	-10°C Min to +65°C Max.
Storage Temperature	-40°C Min to +70°C Max.
	•Small size, low power consumption.
Features	<ul><li>Easy install with two 3mm screw holes.</li></ul>
	<ul> <li>With reverse polarity protection</li> </ul>
Uses	•Electric cabinet, Equipment warning, Machinery
	Refilling, Door Closing.
	•Station, Sub-street, Department store , Shop,
	Bank, Warehouse , Hospital, Museum,
	GarageShutter & Big door safety systems.