
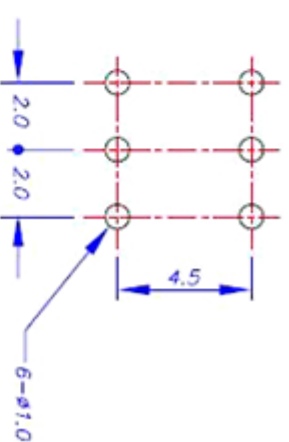
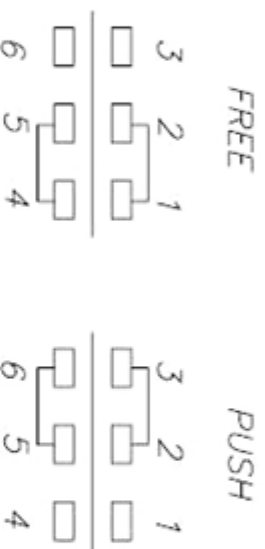







SCHEMATIC

CIRCUIT DIAGRAM

P.C.B. LAYOUT



KNOB DETAILS

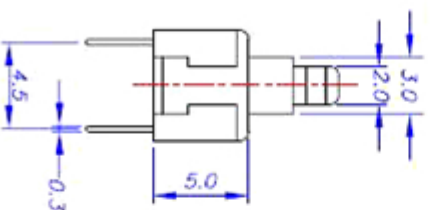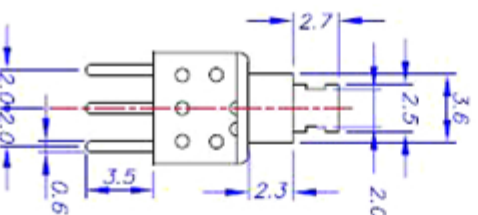

standard

special

SPECIFICATIONS:

- 1.RATING : DC 12V, 0.1A
- 2.CIRCUIT : 2C-2P
- 3.TIMING NON SHORTING
- 4.OPERATING MODE :SELF -LOCK
- 5.STROKE : FULL 2.0mm
LOCK 1.0mm

- 6.General Tolerance:±0.2mm.
- 7.LIFE Mechanical: 100,000 CYCLES

Operating Force	250±80gf
-----------------	----------

大 廣 有 限 公 司 DAKOANG CO.,LTD.

DATE	DWN	CHKD	APVD	MANAGFR
12.26.2011				

PART NAME: MINIATURE PUSH SWITCH

PART NUMBER: 5073B

VERSION:4.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE: