
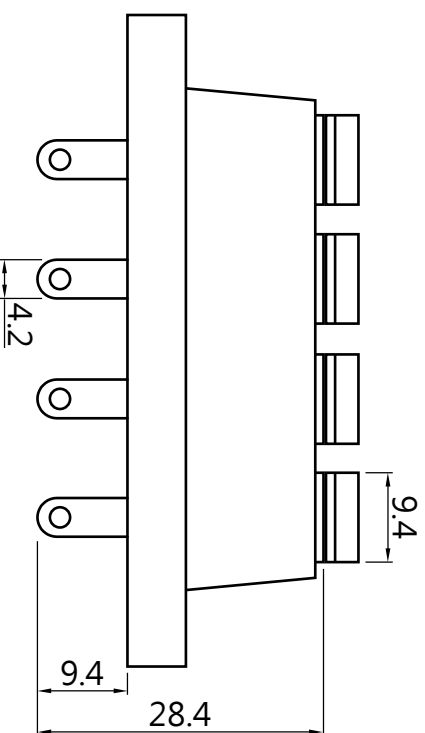
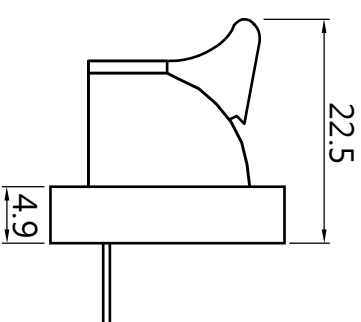


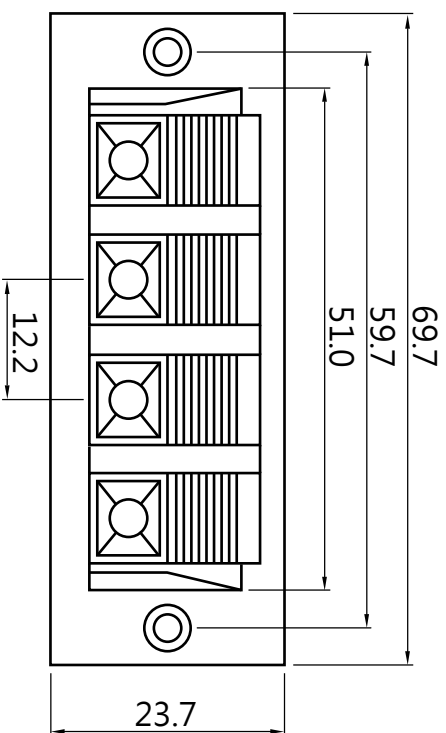

SPECIFICATIONS:

Rated Load : AC 50V 3A
Contact Resistance : 0.03Ω max
Insulation Resistance : 100MΩ min. at DC 500V
Temperature : -40~55°C
Withstand Voltage : AC 500V(50Hz)/min
Life : 5000 Cycles.

大 廣 有 限 公 司 DAKOANG CO., LTD.

DATE

DWN

CHKD

APVD

MANAGFR

12.26.2011

PART NAME: 4P PUSH TERMINAL

PART NUMBER: 3101

VERSION: 4.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: