


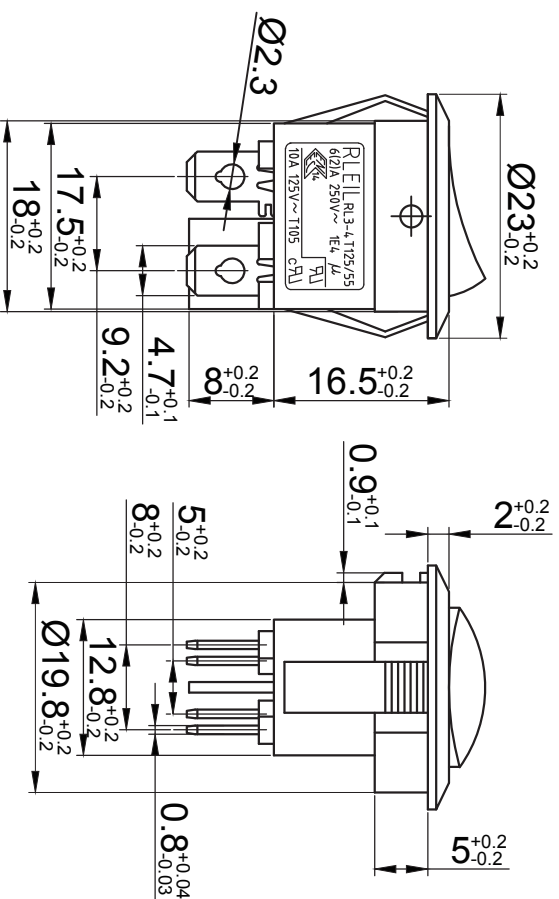


SPECIFICATION

- 1. RATING:UL C-UL:10A 125VAC T105
ENEC SEMKO:
6 (2) A 250VAC T125/55 1E4
- 2. CIRCUIT:ON-OFF DPST 4P
- 3. CONTACT RESISTANCE:30m OHMS Max
- 4. INSULATION RESISTANCE:DC500V 100M OHMS Min
- 5. WITHSTAND VOLTAGE:AC 1500V 1 Minute
- 6. ELECTRICAL LIFE:10000 Cycles at Full Load
- 7. OPERATION PORCE:600~900gf
- 8. OPERATION TEMPERATURE RANGE:-25~125° C

PANEL HOLE SIZE

Panel thickness	X
0.75-1.25	20.2
1.25-2.0	20.4
2.0-3.0	20.6

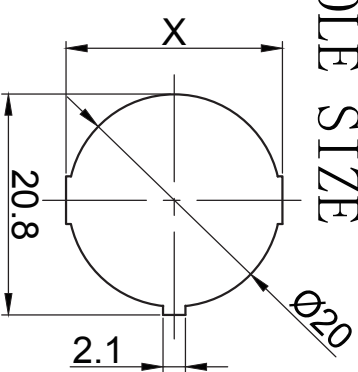

MATERIALS

- 1. HOUSING:Nylon #66 UL 94V-2
- 2. ROCKER:Nylon #66 UL 94V-2
- 3. TERMINAL:Copper Alloy Ag plated
- 4. CONTACTOR:AgSnO₂In₂O₃ (10)/Cu

大 廣 有 限 公 司 DA KOANG CO., LTD.				51720	
设计	签名	年月日	标准化	签名	年月日
绘图	符堉	17.09.15			
审核	张雪飞				
工艺			批准		
TITLE			SERIES		
ROCKER SWITCH			RL3-4(R)		
FUNCTION			ON-OFF		
VIEWS TYPE			DRAWING NUMBER		
					