


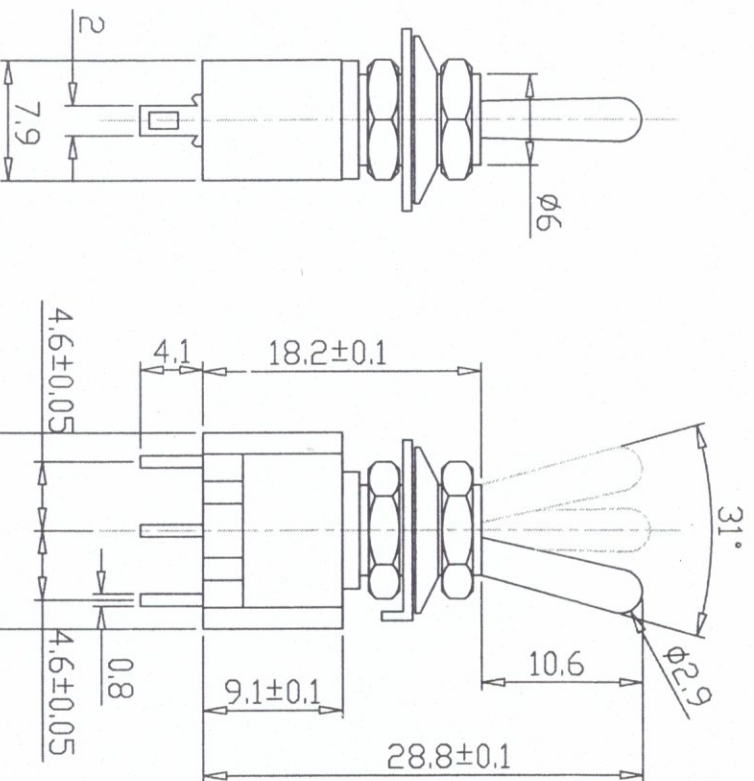

| 一般公差      | 公差   |
|-----------|------|
| 尺寸範圍      | 公差   |
| 0.5-6     | ±0.2 |
| 6-30      | ±0.4 |
| 30-120    | ±0.5 |
| 120-315   | ±1   |
| 315-1000  | ±1.6 |
| 1000-2000 | ±2.4 |

| NO.<br>POLES | MODEL<br>NO. | SWITCH FUNCTION |       |       | TERMINAL<br>QUANTITY |
|--------------|--------------|-----------------|-------|-------|----------------------|
|              |              | POS.1           | POS.1 | POS.1 |                      |
| SPST         | 5027         | DN              | NONE  | DNF   | 2P                   |
| SPST         | 5025         | DN              | NONE  | DN    | 3P                   |
| SPST         | 5025A        | DN              | DNF   | DN    | 3P                   |

#### SPECIFICATION

CONTACT RATING: 5 AMPS @120 V AC or 28 V DC.  
 2 AMPS@250 V AC or 0.4 AMPS @20 V AC or DC.  
 ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.  
 CONTACT RESISTANCE: 10 mΩ max. initial @ 2-4 V DC.  
 100 mA, for both silver and gold plated contacts.  
 INSULATION RESISTANCE: 1,000 MΩ min.  
 DIELECTRIC STRENGTH: 1,000 V RMS @seq level.  
 OPERATING TEMPERATURE: -30°C to 130°C

大廣有限公司  
DA KOANG CO., LTD.

母件編號  
物料編號

單位 mm

母件名稱  
物料名稱

搖頭 SW (3P)

承製廠

數量 1 PCS

日期 990325